

Epson EB-XQ2030B

EPSON EB-XQ2030B



Brief Introduction

Beta 2.5

Brief introduction to the EB-XQ2030B: The Epson Laser LCD projector offers 30,000 ANSI lumens, a contrast ratio of 5,000,000:1, and a UHD (4K2K) resolution of 3840 x 2160. Thanks to its laser technology, the projector has a specified light life of 30,000 hours, which would be equivalent to over 20.5 years at 4 hours per day. The projector can illuminate a screen width of 1508 cm well. The projector can handle rooms with residual light with a smaller screen width; we would recommend a maximum of 1005 cm here. If the screen width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together.

Display Type

3 x 1,04" LCD TFT Panel
UHD 16/9 Liquid Crystal Display

Ansi-Lumen
Contrast
Black Level
Offset

Projector 30000
5000000:1 full on/off
0,0060 min. Lumen
Screen 13333 Lux (200 cm Screen width)
5000000:1 full on/off
0,003 min. Lumen

Resolution
Video Modes
Application
Light Source
Light Life

UHD (4K2K) 3840 x 2160
8.294.400 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p
Event | Very large screen width and rooms with plenty of light and shaded daylight.
Laser
30000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

-

Connections

2x HDMI (1x Out) in
Mini Jack Audio out
Wired Remote in
12G-SDI in und out
2x USB-A (5V/2A) in
USB-B in (Service)
RS232C Din 9 pin in
RJ45 in
HDBaseT

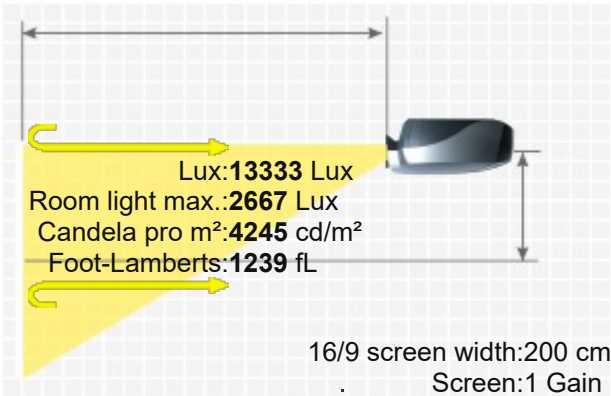



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
-
620 x 220 x 580 mm (24,4"x8,7"x22,8") 79,11 L/dm³
-

Weight
Keystone
Illumination

36,80 kg / 79,37 lbs.
-
-

Frequenz

-

Foot-Lamberts

1239 fL / max. 1508 cm screen width
4245 cd/m²

- Full HD 1080P compatible
- Warping
- Edge Blending
- Lan network compatible.
- Simple Stacking

Features

Screen Mirroring

-



Optional accessories



Deckenhalterung

HeavyDuty

470,94 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
ELPLL08	5.27-7.41:1	1054-1482 m			Powered
ELPLM11H	3.42-5.23:1	684-1046 m			Powered
ELPLM10H	2.34-3.59:1	468-718 m			Powered
ELPLM15H	1.52-2.47:1	304-494 m			Powered
ELPLL11H	7-11:1	1400-2200 m			Powered
ELPLW06H	1.15-1.57:1	230-314 m			Powered
ELPLW08H	0.38-1.17:1	76-234 m			Powered
ELPLU04H	0.61-0.85:1	122-170 m			Powered
ELPLU07H	0.46-0.62:1	92-124 m			Powered
ELPLX04H	0.39-0.49:1	78-98 m			Powered
ELPLU06H	0.39-0.49:1	78-98 m			Powered
ELPLX02WS	0.35:1	70 m			No Zoom
ELPLX02S	0.35:1	70 m			No Zoom

Status 2026 Current model // Last update of the data: 2026-03-02

Created: 2026-02-06 09:22:24

Data





HCinema

<https://www.projector-database.com/pro/epsonebxq2030b-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.