

Epson USA PowerLite 700C



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

A brief introduction to the Epson USA PowerLite 700C. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 350:1. An image width of up to 246 cm is possible as the projector has 800 Ansi lumens. However, if room light is available, the image should be max. 164 cm wide. This model is no longer offered by Epson USA.

3 x 1,32" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

800
350:1 full on/off
2,2857 min. Lumen
267 Lux (bei 200 cm Screen)
350:1 full on/off
0,769 min. Lumen

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
NTSC, PAL, SECAM Pal 60 NTSC 4,43
Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

120W UHE Lamp
Articel Nr.: ELP LP10B
2000 h.

Manual

Manual 1,2

F=2,0-2,2 f=35-42 mm

1,3-1,57:1


1W

D-sub 15pin in
Cinch Stereo in
Cinch Video in
Mini Jack in und out
S-Video in



Yes
180W
267 x 89 x 213 mm (10,5"x3,5"x8,4") 5,06 L/dm³
40dB

2,60 kg / 5,73 lbs.
Vert.: +/-15°

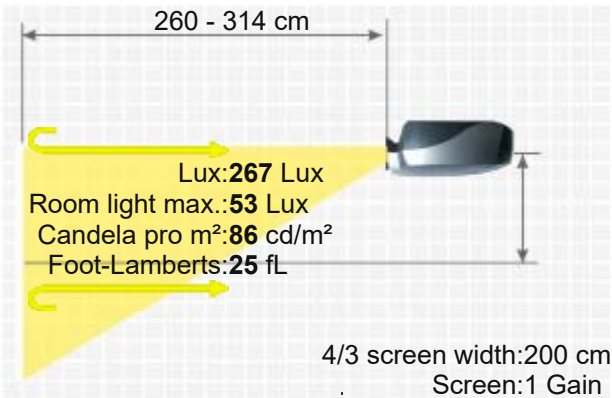

Key: 70 cm

Weight
Keystone

EPSON USA POWERLITE 700C

Illumination85%
 FrequenzH-sync: 15-92 kHz
 V-sync: 50-96 Hz
 Range max.: 162 MHz
 Foot-Lamberts25 fL / max. 246 cm screen width
 86 cd/m²

Features

- Freeze
- Picture-in-Picture

Status2000 Discontinued (EOL) // Last update of the data: 2023-08-04
 Data



More Details



HCinema

<https://www.projector-database.com/pro/epsonpowerlite700c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.