


Epson USA Pro L1100U

EPSON USA PRO L1100U



A brief introduction to the Pro L1100U: The Epson USA laser LCD projector offers 6000 Ansi lumens, a contrast of 2000000:1 and a UHD (4K2K) 3840 x 2160 resolution. Thanks to the laser, the service life is 20000 hours, which is over 13.7 years if enjoyed for four hours a day. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 6000 Ansi lumens, a picture width of 787 cm is possible. The projector will also work with slightly brighter rooms with a smaller image width (we recommend max. 525 cm). If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Playing 1080P and 4K is also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. The projector was launched in 2016 and is no longer sold by the manufacturer.

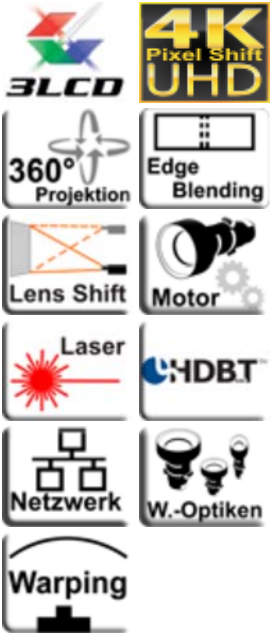

3 x LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

6000

2000000:1

0,0030 min. Lumen

Vert.: +/-67% Hori.: +/-30%

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

HD4K 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 € Laser

Powered

Powered 1,38

F=1,65-2,27

1,65-2,27:1


1 x 10W

HDMI mit HDCP 2.2 in
DVI-D in
D-sub 15pin in und out
5 x BNC RGBHV in

2667 Lux (bei 200 cm Screen)

2000000:1

0,001 min. Lumen

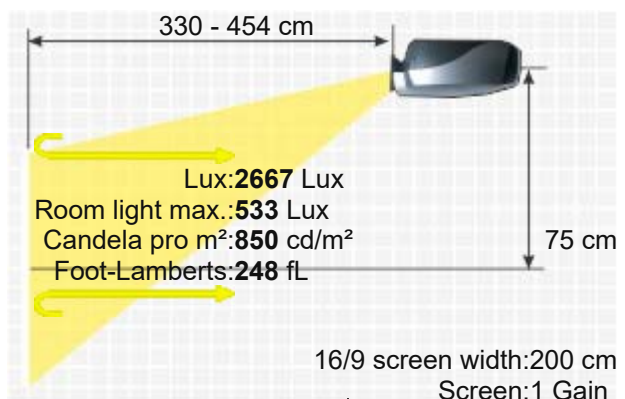


Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 in
RJ45 mit HDBaseT in
Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
680W
586 x 185 x 492 mm (23,1"x7,3"x19,4") 53,34 L/dm³
35 / 29 dB in Eco Mode

Weight
Keystone
Illumination

21,00 kg / 46,3 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

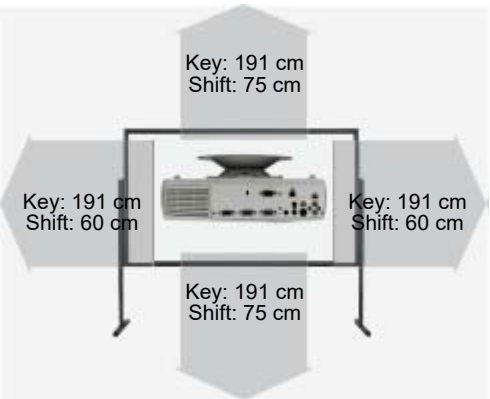

Frequenz
Foot-Lamberts

-
248 fL / max. 787 cm screen width
850 cd/m²
■ Full HD 1080P compatible
■ Lens shift Funktion
■ Eco Mode
■ Kensington Slot
■ Warping
■ 360° installable
■ Edge Blending
■ Lan network compatible.

Features

Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original
Object lens original

V12H004Y01 / ELPLX01W
V12H004W05 / ELPLW05
V12H004UA3 / ELPLU03S
V12H004U03 / ELPLU03
V12H004M0B / ELPLM11
V12H004M0A / ELPLM10
V12H004M09 / ELPLM09
V12H004M08 / ELPLM08
V12H004L08 /NELPLL08
ELPLU04 / V12H004U04
ELPLL08 / V12H004L08

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1785>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLW05	1.04-1.46:1	2.1-2.9 m	+/-67%	+/-30%	Powered
ELPLU04	0.87-1.06:1	1.7-2.1 m	+/-67%	+/-30%	Powered
ELPLU03	0.65-0.78:1	1.3-1.6 m	+/-67%	+/-30%	Powered
ELPLM11	4.84-7.39:1	9.7-14.8 m	+/-67%	+/-30%	Powered
ELPLM10	3.31-5.07:1	6.6-10.1 m	+/-67%	+/-30%	Powered
ELPLM09	2.15-3.49:1	4.3-7 m	+/-67%	+/-30%	Powered
ELPLM08	1.45-2.32:1	2.9-4.6 m	+/-67%	+/-30%	Powered
ELPLL08	7.2-10.12:1	14.4-20.2 m	+/-67%	+/-30%	Powered
Fix Optional Lenses					
ELPLX01	0.35:1	0.7 m	+/-17%	+/-10%	No Zoom

Status
Data

2016 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-07-14 10:05:15



HCinema

<https://www.projector-database.com/pro/epsonproL1100u-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.