


# Epson USA Pro L1500U

EPSON USA PRO L1500U

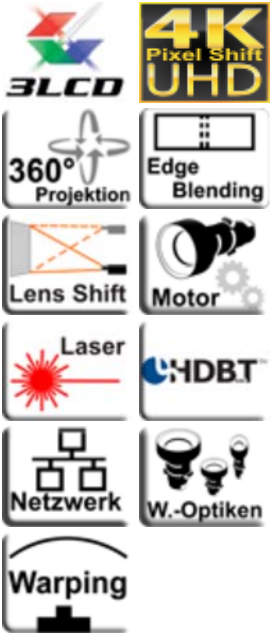

With the Pro L1500U, manufacturer Epson USA offers an LCD laser projector with UHD (4K2K) 3840 x 2160 resolution and a contrast of 2000000:1. Due to the laser, the projector is specified with 20000 hours of light life, which is over 13.7 years with a daily viewing time of 4 hours. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. 1113 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 742 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Even 1080P and 4K video signals are no problem for the projector, and it even has the option of projecting HD 1080P and 4K Blu-rays onto the ceiling thanks to 360° projection. On the market since 2016, the model is no longer offered by the manufacturer Epson USA, but is still very popular in our projector database.

 3 x LCD TFT Panel  
 HDTV 16/9 Liquid Crystal Display

|           |                   |        |                              |
|-----------|-------------------|--------|------------------------------|
| Projector | 12000             | Screen | 5333 Lux (bei 200 cm Screen) |
|           | 2000000:1         |        | 2000000:1                    |
|           | 0,0060 min. Lumen |        | 0,003 min. Lumen             |

Vert.: +/-60% Hori.: +/-18%  
 UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift  
 HD4K 4096 x 2160 compressed

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Application Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source Laser

Light Life 20000 h.

Operating Costs 0,00 € Laser

Focus Powered


Zoom Powered 1,62

Objective F=1,8-2,51

Throw Ratio 1,58-2,56:1

Audio -

Connections  
 HDMI mit HDCP 2.2 in  
 DVI-D in  
 D-sub 15pin in und out  
 5 x BNC RGBHV in  
 Mini Jack Audio in und out

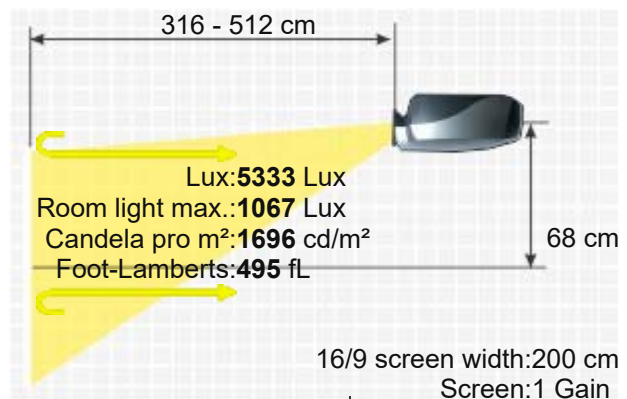

Brief Introduction  
 Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

SDI 3G in  
RS232C Din 9 pin in  
RJ45 in  
RJ45 mit HDBaseT in



Ceiling Mounting Yes  
Power 920W  
Size WxHxD 586 x 185 x 492 mm (23,1"x7,3"x19,4") 53,34 L/dm³  
Operating Noise 35 / 29 dB in Eco Mode

Weight 22,00 kg / 48,5 lbs.  
Keystone Vert.: +/-30°  
Hori.: +/-30°  
Illumination -

Frequenz -

Foot-Lamberts 495 fL / max. 1113 cm screen width  
1696 cd/m²


- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- Edge Blending
- Lan network compatible.

Features

Optional

|                      |                       |
|----------------------|-----------------------|
| Object lens original | V12H004W05 / ELPLW05  |
| Object lens original | V12H004UA3 / ELPLU03S |
| Object lens original | V12H004U03 / ELPLU03  |
| Object lens original | V12H004M0B / ELPLM11  |
| Object lens original | V12H004M0A / ELPLM10  |
| Object lens original | V12H004M09 / ELPLM09  |
| Object lens original | V12H004L08 / NELPLL08 |
| Object lens original | ELPLW06 / V12H004W06  |
| Object lens original | ELPLU04 / V12H004U04  |
| Object lens original | ELPLL08 / V12H004L08  |

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1363>

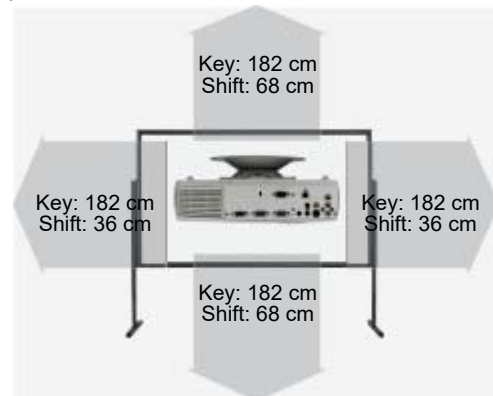

#### Optional Lenses

| Name                 | Ratio       | Distance    | Shift V | Shift H | Zoom    |
|----------------------|-------------|-------------|---------|---------|---------|
| Zoom Optional Lenses |             |             |         |         |         |
| ELPLW06              | 1.19-1.63:1 | 2.4-3.3 m   | +/-60%  | +/-18%  | Powered |
| ELPLW05              | 1.19-1.63:1 | 2.4-3.3 m   | +/-24%  | +/-10%  | Powered |
| ELPLU04              | 0.64-0.78:1 | 1.3-1.6 m   | +/-60%  | +/-18%  | Powered |
| ELPLU03              | 0.48-0.57:1 | 1-1.1 m     | +/-24%  | +/-10%  | Powered |
| ELPLM11              | 3.54-5.41:1 | 7.1-10.8 m  | +/-60%  | +/-18%  | Powered |
| ELPLM10              | 2.43-3.71:1 | 4.9-7.4 m   | +/-60%  | +/-18%  | Powered |
| ELPLM09              | 1.58-2.56:1 | 3.2-5.1 m   | +/-60%  | +/-18%  | Powered |
| ELPLL08              | 5.28-7.72:1 | 10.6-15.4 m | +/-60%  | +/-18%  | Powered |

#### Fix Optional Lenses

|         |        |       |        |        |         |
|---------|--------|-------|--------|--------|---------|
| ELPLX02 | 0.35:1 | 0.7 m | +/-21% | +/-15% | No Zoom |
|---------|--------|-------|--------|--------|---------|

More Details



# HCinema

<https://www.projector-database.com/pro/epsonproL1500U-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.