

Epson USA Pro L1070UNL

EPSON USA PRO L1070UNL



A brief introduction to the Pro L1070UNL: The Epson USA stationary laser LCD projector offers 7000 Ansi lumens, a contrast of 2500000:1 and a WUXGA 1920 x 1200 resolution. The lifespan of the laser is 20000 hours, which is equivalent to over 13.7 years at 4 hours per day. The integrated lens shift gives freedom when positioning the projector. 7000 Ansi lumens ensure that a picture width of 850 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 567 cm. Furthermore, it is Full HD 1080P and 4K (compressed) compatible, and even has the option of projecting HD 1080P and 4K (compressed) Blu-rays onto the ceiling using 360° projection. This model is no longer offered by Epson USA.



3 x 0,76" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

7000 / 4900 im Eco Mode

2500000:1 full on/off

0,0028 min. Lumen

Vert.: +/-67% Hori.: +/-30%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h. 30000 h. in Eco Mode

0,00 € Laser

Powered

Powered 1,62

F=1,7-2,3 f=24-38,20 mm

1,44-2,33:1

1 x 10W


HDMI HDCP 2.2 in
DVI-D in
D-sub 15pin in und out
5 x BNC RGBHV in

3111 Lux (200 cm Screen width)

2500000:1 full on/off

0,001 min. Lumen

Screen

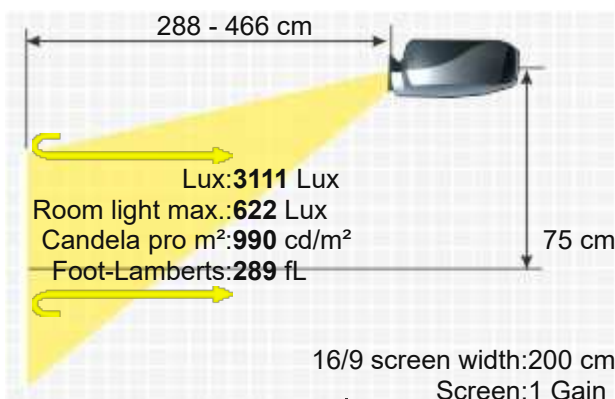

Cinch Audio in und out
 Mini Jack Audio in und out
 USB in
 RS232C Din 9 pin in
 RJ45 in
 HDBaseT in



Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes, is possible.

416W / 299W in Eco Mode

545 x 164 x 436 mm (21,5"x6,5"x17,2") 38,97 L/dm³

36 / 30 dB in Eco Mode

Weight

Keystone

Illumination

16,90 kg / 37,26 lbs.

Vert.: +/-45°

Hori.: +/-30°

-

Frequenz

-

Foot-Lamberts

289 fL / max. 850 cm screen width

990 cd/m²

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Eco Mode

Features

■ 360° installable

■ 24/7 continuous operation capable


■ Optional Wi-Fi network compatible.

■ Lan network compatible.

■ Crestron®-Software compatible.

Screen Mirroring

-

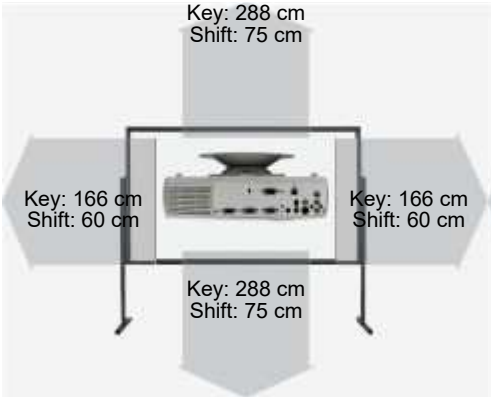

Optional accessories

	Objektiv Original	V12H004UA3 / ELPLU03S	4.138,56 €
	Objektiv Original	ELPLU04 / V12H004U04	3.808,74 €
	Objektiv Original	ELPLW06 / V12H004W06	2.776,57 €
	Objektiv Original	ELPLW08 / V12H004W08	6.188,00 €
	Objektiv Original	V12H004Y01 / ELPLX01W	EOL €
	Objektiv Original	ELPLM15 / V12H004M0F	1.662,67 €
	Objektiv Original	V12H004M0B / ELPLM11	1.715,47 €
	Objektiv Original	V12H004M0A / ELPLM10	1.715,47 €
	Objektiv Original	V12H004M08 / ELPLM08	554,15 €

	Objektiv Original	V12H004W05 / ELPLW05	1.717,85 €
	Objektiv Original	V12H004U03 / ELPLU03	EOL €
	Objektiv Original	ELPLL08 / V12H004L08	2.776,57 €
	Deckenhalterung Länge 225 mm	Halterung45	83,60 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
ELPLM11	4.85-7.38:1	970-1476 m	+/-67%	+/-30%	Powered
ELPLM10	3.32-5.06:1	664-1012 m	+/-67%	+/-30%	Powered
ELPLM15	2.16-3.48:1	432-696 m	+/-67%	+/-30%	Powered
ELPLM08	1.45-2.32:1	290-464 m	+/-67%	+/-30%	Powered
ELPLW06	1.62-2.22:1	324-444 m	+/-67%	+/-30%	
ELPLL08	7.21-10.11:1	1442-2022 m	+/-67%	+/-30%	Powered
ELPLW08	1.18-1.86:1	236-372 m	+/-67%	+/-30%	Powered
ELPLW05	1.04-1.46:1	208-292 m	+/-67%	+/-30%	
ELPLU04	0.87-1.05:1	174-210 m	+/-67%	+/-30%	Powered
ELPLU03S	0.65-0.78:1	130-156 m	+/-67%	+/-30%	
ELPLX01/ELPLX01W	0.35:1	70 m	51.06% Fix	+/-10%	No Zoom

Status 2020 Discontinued (EOL) // Last update of the data: 2026-05-05
Created: 2020-03-17 12:17:45

Data

More Details



HCinema

<https://www.projector-database.com/pro/epsonprol1070unl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.