

Epson USA Pro L20000UNL

EPSON USA PRO L20000UNL



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes
Application
Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The Pro L20000UNL laser LCD projector from Epson USA has 20000 Ansi lumens, a contrast of 2500000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer Epson USA specifies a service life of 20000 hours, which converts to over 13.7 years at 4 hours per day. An image width of up to 1437 cm is possible as the projector has 20000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 958 cm. Furthermore, the projector can play 1080P and 4K (compressed) without any problems. This model is no longer offered by Epson USA.



3 x LCD Panel
WUXGA 16/9 Liquid Crystal Display

Projector

20000
2500000:1
0,0080 min. Lumen

Screen

8889 Lux (bei 200 cm Screen)
2500000:1
0,004 min. Lumen

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K+2K) 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h. 30000 h. in Eco Mode

0,00 € Laser

Powered


Powered 1,6

F=1,8-2,35 f=36-57,4 mm

1,57-2,56:1

-

DVI-D x 1
HDMI x 1 (HDCP2.2)
3G-SDI x 1 (SDI out x 1 - Active through)
HDBaseT x 1
5-BNC
VGA in und out
RS232c
RJ45
USB

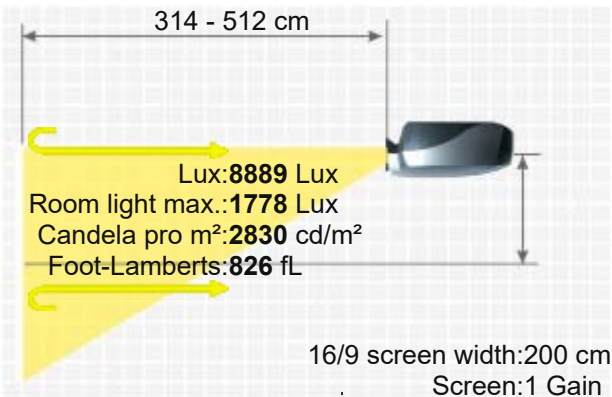

Ceiling Mounting	Display Port x 2
Power	Yes
Size WxHxD	1860W / 1123W in Eco Mode
Operating Noise	619,8 x 358,1 x 789,9 mm (24,4"x14,1"x31,1") 174,84 L/dm³
	45 / 38 dB in Eco Mode

Weight	49,58 kg / 108,03 lbs.
Keystone	-
Illumination	-
Frequenz	-

Foot-Lamberts	826 fL / max. 1437 cm screen width
	2830 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.

Features	Object lens original	V12H004UA3 / ELPLU03S
	Object lens original	V12H004U03 / ELPLU03
	Object lens original	V12H004M0B / ELPLM11
	Object lens original	V12H004M0A / ELPLM10
Optional	Object lens original	V12H004L08 /NELPLL08
	Object lens original	ELPLW08 / V12H004W08
	Object lens original	ELPLU04 / V12H004U04
	Object lens original	ELPLM15 / V12H004M0F
	Object lens original	ELPLL08 / V12H004L08

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc36795>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLW08	0.86-1.21:1	1.7-2.4 m			Powered
ELPLU04	0.87-1.08:1	1.7-2.2 m			Powered
ELPLU03	1.62-2.27:1	3.2-4.5 m			Powered
ELPLU03	0.65-0.8:1	1.3-1.6 m			
ELPLM15	1.57-2.56:1	3.1-5.1 m			Powered
ELPLM11	4.85-7.54:1	9.7-15.1 m			Powered
ELPLM10	3.32-5.17:1	6.6-10.3 m			Powered
ELPLL08	7.21-10.33:1	14.4-20.7 m			Powered
ELPLU03S	0.48-0.57:1	1-1.1 m			Powered
Fix Optional Lenses					
ELPLU03S	0.35:1	0.7 m			No Zoom

Status 2020 Discontinued (EOL) // Last update of the data: 2024-05-16
Created: 2020-03-29 15:58:48



