

# Epson USA Pro L30000UNL

EPSON USA PRO L30000UNL



A brief introduction to the Pro L30000UNL: The Epson USA laser LCD projector offers 30000 Ansi lumens, a contrast of 2000000:1 and a WUXGA 1920 x 1200 resolution. Due to the laser, the projector is specified with 20000 hours of light life, which converts to over 13.7 years at 4 hours per day. The built-in lens shift and keystone correction function provides freedom in projection adjustment. The projector can illuminate images up to 1760 cm wide thanks to its 30000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 1173 cm is recommended. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 4K (compressed) are also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection.



3 x LCD TFT Panel  
WUXGA 16/9 Liquid Crystal Display

## Brief Introduction Beta 2.5

### Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus


Zoom

Objective

Throw Ratio

30000  
2000000:1 full on/off  
0,0150 min. Lumen  
Vert.: +/-65% Hori.: +/-30% motorisch  
WUXGA 1920 x 1200  
2.304.000 Pixel  
HD4K 4096 x 2160 compressed  
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p  
Event | Very large screen width and rooms with plenty of light and shaded daylight.  
Laser Diode  
20000 h. 30000 h. in Eco Mode  
0,00 € Laser

Projector  
Screen  
13333 Lux (bei 200 cm Screen)  
2000000:1 full on/off  
0,007 min. Lumen

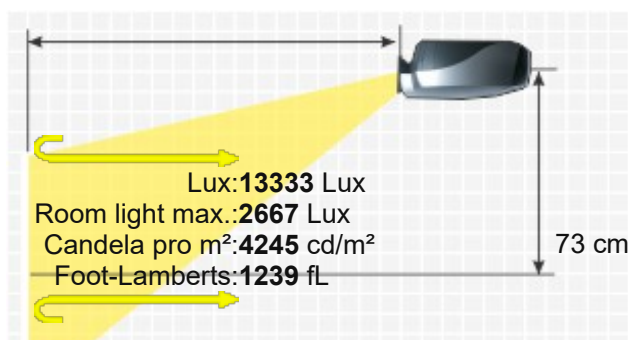

HDMI mit HDCP 2.2 in  
DVI in  
5 x BNC RGBHV in  
D-Sub 15 pin in und out  
SDI in  
RJ45  
USB Typ A,B  
RS232C  
HDBaseT in



Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes, is possible.  
2325 / 1511W in Eco Mode  
790 x 299 x 710 mm (31,1"x11,8"x28") 167,71 L/dm³  
49 / 41 dB in Eco Mode

Weight

Keystone

Illumination

63,80 kg / 140,65 lbs.  
Vert.: +/-45°  
Hori.: +/-30°  
-

Frequenz

-


Foot-Lamberts

1239 fL / max. 1760 cm screen width  
4245 cd/m²

- Features
- Full HD 1080P compatible
  - Lens shift Funktion motorisch
  - Blank (Black screen button)
  - Eco Mode
  - Kensington Slot
  - sRGB
  - Dynamic iris
  - High Dynamic Range (HDR)
  - Warping
  - 360° installable
  - 24/7 continuous operation capable
  - Edge Blending
  - Password protection
  - Optional Wi-Fi network compatible.
  - Lan network compatible.
  - Crestron®-Software compatible.

Screen Mirroring

-

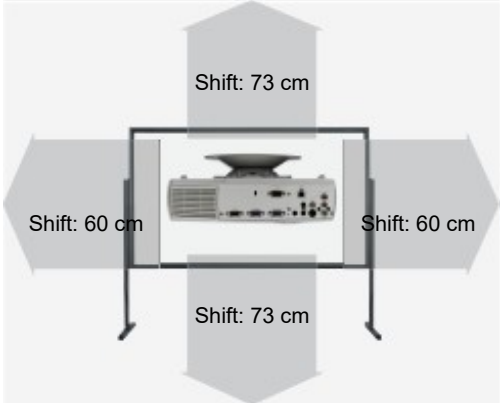

| Optional accessories |                   |                      |             |
|----------------------|-------------------|----------------------|-------------|
|                      | Objektiv Original | V12H004W07 / ELPLW07 | 10.434,34 € |
|                      | Objektiv Original | V12H004U05 / ELPLU05 | 15.205,91 € |
|                      | Objektiv Original | V12H004R05 / ELPLR05 | 15.205,91 € |
|                      | Objektiv Original | V12H004M0E / ELPLM14 | 7.252,98 €  |
|                      | Objektiv Original | V12H004M0D / ELPLM13 | 7.252,98 €  |

|                                                                                  |                   |                      |             |
|----------------------------------------------------------------------------------|-------------------|----------------------|-------------|
|    | Objektiv Original | V12H004M0C / ELPLM12 | 7.252,98 €  |
|   | Objektiv Original | V12H004L0A / ELPLL10 | 15.205,91 € |
|  | Objektiv Original | V12H004L09 / ELPLL09 | 10.077,28 € |
|  | Deckenhalterung   | HeavyDuty            | 378,28 €    |

| Optional Lenses      |              |             |         |         |         |
|----------------------|--------------|-------------|---------|---------|---------|
| Name                 | Ratio        | Distance    | Shift V | Shift H | Zoom    |
| Zoom Optional Lenses |              |             |         |         |         |
| ELPLW07 / V12H004W07 | 1.29-1.76:1  | 2.6-3.5 m   | +/-65%  | +/-30%  | Powered |
| ELPLU05 / V12H004U05 | 0.9-1.09:1   | 1.8-2.2 m   | +/-55%  | +/-25%  | Powered |
| ELPLM14 / V12H004M0E | 3.41-5.11:1  | 6.8-10.2 m  | +/-65%  | +/-30%  | Powered |
| ELPLM13 / V12H004M0D | 2.38-3.46:1  | 4.8-6.9 m   | +/-65%  | +/-30%  | Powered |
| ELPLM12 / V12H004M0C | 1.74-2.35:1  | 3.5-4.7 m   | +/-65%  | +/-30%  | Powered |
| ELPLL10 / V12H004L0A | 6.73-10.45:1 | 13.5-20.9 m | +/-55%  | +/-25%  | Powered |
| ELPLL09 / V12H004L09 | 4.79-7.2:1   | 9.6-14.4 m  | +/-55%  | +/-25%  | Powered |
| Fix Optional Lenses  |              |             |         |         |         |
| ELPLR05 / V12H004R05 | 0.63:1       | 1.3 m       | +/-15%  | +/-5%   | No Zoom |

Status 2020 Current model // Last update of the data: 2025-03-03  
Created: 2020-01-28 08:45:12



More Details



# HCinema

<https://www.projector-database.com/pro/epsonusaprol30000unl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.