

Epson USA Pro L30002UNL

EPSON USA PRO L30002UNL



The Epson USA Pro L30002UNL laser LCD projector has 30000 Ansi lumens, a contrast of 2500000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. The projector also offers a lens shift function, which makes image adjustment childs play. Thanks to the brightness of 30000 Ansi lumens, a picture width of 1760 cm is possible. The projector will also cope with slightly brighter rooms with a smaller picture width (we recommend max. 1173 cm). In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 4K (compressed) are also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection.



3 x LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Projector

30000
2500000:1 full on/off
0,0120 min. Lumen
Vert.: +/-65% Hori.: +/-30% motorisch
WUXGA 1920 x 1200

Screen

13333 Lux (bei 200 cm Screen)
2500000:1 full on/off
0,005 min. Lumen

Resolution

2.304.000 Pixel
HD4K 4096 x 2160 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser Diode

Light Life

20000 h. 30000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus


Powered

Zoom

Powered 1,35

Objective

F=1,9-2,1 f=54,7-73,0 mm

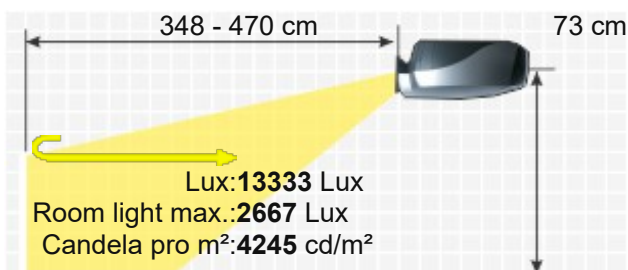

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio1,74-2,35:1

AudioNein

Foot-Lamberts:1239 fL

16/9 screen width:200 cm

Screen:1 Gain

Connections

HDMI mit HDCP 2.2 in

DVI in

5 x BNC RGBHV in

D-Sub 15 pin in und out

SDI in

RJ45

USB Typ A,B

RS232C

HDBaseT in



Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes, is possible.

2325 / 1511W in Eco Mode

790 x 299 x 710 mm (31,1"x11,8"x28") 167,71 L/dm³

49 / 41 dB in Eco Mode

Weight

Keystone

Horiz.: +/-45°

Vert.: +/-30°

Illumination

-

Frequenz

-

Foot-Lamberts


1239 fL / max. 1760 cm screen width

4245 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion motorisch
 - Blank (Black screen button)
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Dynamic iris
 - High Dynamic Range (HDR)
 - Warping
 - 360° installable
 - 24/7 continuous operation capable
 - Edge Blending
 - Password protection
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - Crestron®-Software compatible.

Screen Mirroring

-

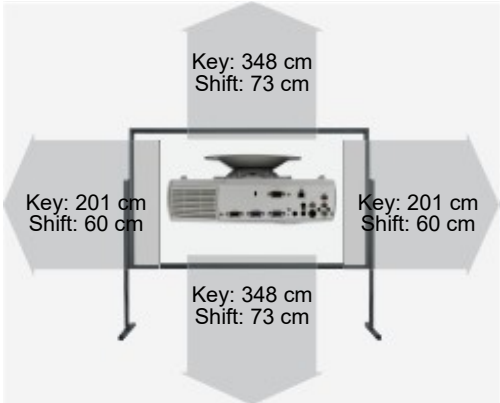

Optional accessories

	Objektiv Original	V12H004W07 / ELPLW07	10.434,34 €
	Objektiv Original	V12H004U05 / ELPLU05	15.205,91 €
	Objektiv Original	V12H004R05 / ELPLR05	15.205,91 €
	Objektiv Original	V12H004M0E / ELPLM14	7.252,98 €

	Objektiv Original	V12H004M0D / ELPLM13	7.252,98 €
	Objektiv Original	V12H004M0C / ELPLM12	7.252,98 €
	Objektiv Original	V12H004L0A / ELPLL10	15.205,91 €
	Objektiv Original	V12H004L09 / ELPLL09	10.077,28 €
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLW07 / V12H004W07	1.29-1.76:1	2.6-3.5 m	+/-65%	+/-30%	Powered
ELPLU05 / V12H004U05	0.9-1.09:1	1.8-2.2 m	+/-55%	+/-25%	Powered
ELPLM14 / V12H004M0E	3.41-5.11:1	6.8-10.2 m	+/-65%	+/-30%	Powered
ELPLM13 / V12H004M0D	2.38-3.46:1	4.8-6.9 m	+/-65%	+/-30%	Powered
ELPLM12 / V12H004M0C	1.74-2.35:1	3.5-4.7 m	+/-65%	+/-30%	Powered
ELPLL10 / V12H004L0A	6.73-10.45:1	13.5-20.9 m	+/-55%	+/-25%	Powered
ELPLL09 / V12H004L09	4.79-7.2:1	9.6-14.4 m	+/-55%	+/-25%	Powered
Fix Optional Lenses					
ELPLR05 / V12H004R05	0.63:1	1.3 m	+/-15%	+/-5%	No Zoom

Status 2020 Current model // Last update of the data: 2025-03-03
Created: 2020-09-18 10:01:53



More Details



HCinema

<https://www.projector-database.com/pro/epsonusaprol30002unl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.