

Infoto PCL-LT101X



INFO TO PCL-LT101X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Infoto PCL-LT101X LCD projector has 3100 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours a day. Thanks to the brightness of 3100 Ansi lumens, a picture width of 485 cm is possible. In room light, the picture should be max. 323 cm wide. Playing 1080P is also no problem for the projector. On the market since 2016, the model is no longer offered by the manufacturer Infoto.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

3100

3000:1 full on/off

1,0333 min. Lumen

Screen

1033 Lux (bei 200 cm Screen)

3000:1 full on/off

0,345 min. Lumen

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

218W Lamp

6000 h. 10000 h. in Eco Mode

-

Manual

Manual 1,2

F=2,1-2,25 f=19,109-22,936 mm

1,48-1,78:1

-

HDMI in

D-sub 15pin in und out

S-Video in

RS232C Din 9 pin in

Yes

270W

347 x 109 x 257 mm (13,7"x4,3"x10,1") 9,72 L/dm³

-

3,20 kg / 6,61 lbs.

Vert.: +/-30°



90%

H-sync: 15-100 kHz

V-sync: 45-85 Hz

96 fL / max. 485 cm screen width

329 cd/m²

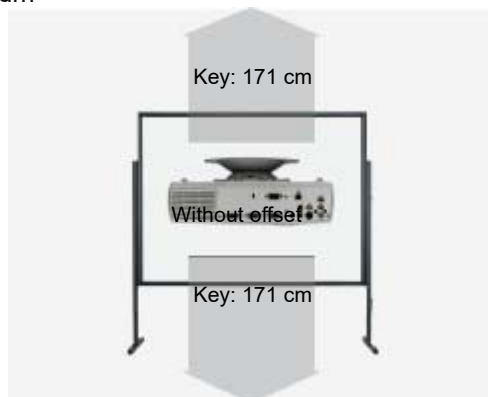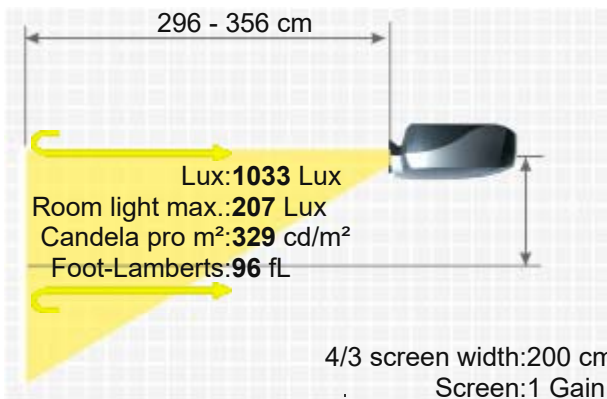

■ Full HD 1080P compatible

■ Eco Mode

■ Kensington Slot

2016 Discontinued (EOL) // Last update of the data: 2024-07-04



HCinema

<https://www.projector-database.com/pro/infotoPCLLT101X-en.html>

Features

Status
Data

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.