

Jingrui LP 800B



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

A brief introduction to the Jingrui LP 800B. The standard portable LCD projector has an SVGA 800 x 600 resolution and a contrast of 350:1. An image width of up to 337 cm is possible. However, the image should be smaller in room light. We recommend max. 225 cm. The projector is no longer sold by the manufacturer.



3 x LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

1500

350:1

4,2857 min. Lumen

500 Lux (bei 200 cm Screen)

350:1

1,441 min. Lumen

Screen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W Lamp

-

-

-

-

-

-

-

-

Yes

170W

270 x 115 x 360 mm (10,6"x4,5"x14,2") 11,18 L/dm³

-

4,00 kg / 8,82 lbs.

Vert.: +/-15°

96%


-

46 fL / max. 337 cm screen width

158 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

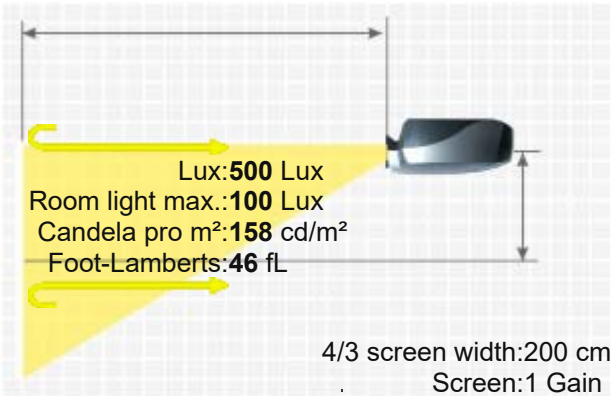

JINGRUI LP 800B



HCinema

<https://www.projector-database.com/pro/jingruilp800b-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.