

Lasergraphics LG2000



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

The stationary LG2000 LCD projector from Lasergraphics has 1100 Ansi lumens, a contrast of 200:1 and an XGA 1024 x 768 resolution. An image width of up to 289 cm is possible. However, the image should be smaller in room light. We recommend max. 193 cm. The model is no longer offered by Lasergraphics.



XGA 4/3 Liquid Crystal Display

1100

200:1 full on/off

5,5000 min. Lumen

-

XGA 1024 x 768

786.432 Pixel

NTSC, NTSC 4.43/ PAL / PAL-M / PAL-N , SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

150-W UHB Lamp

Articel Nr.: LMPf3467

2000 h.

-

Powered

Powered 1,3

-

-

2 x 2W Stereo

D-sub 15pin in und out

Video Cinch in

2 x Cinch Stereo in

2 x S-Video in

mini Jack in und out

-

350W

-

-

10,00 kg / 22,05 lbs.

-

-


-

33 fL / max. 289 cm screen width

113 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

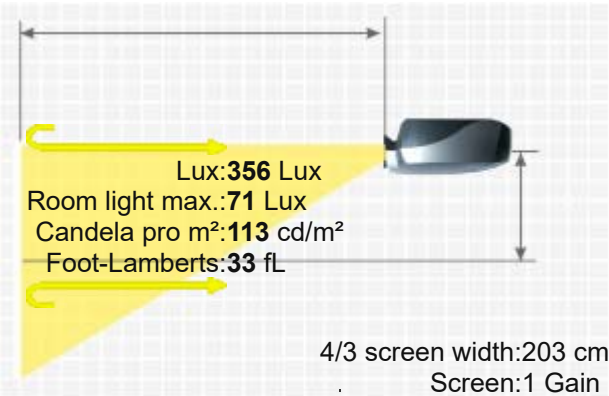

More Details



HCinema

<https://www.projector-database.com/pro/lasergraphicslg2000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.