

Liesegang digital.vision 6100

LIESEGGANG DIGITAL.VISION 6100



The Liesegang digital.vision 6100 standard portable DLP projector has 1300 Ansi lumens, a contrast of 650:1 and an XGA 1024 x 768 resolution. Due to the brightness of 1300 Ansi lumens, a picture width of 314 cm is possible. In room light, the picture should be max. 209 cm wide. This model is no longer offered by Liesegang.



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

1300
650:1 full on/off
2,0000 min. Lumen

Screen

421 Lux (bei 203 cm Screen)
650:1 full on/off
0.651 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, NTSC, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W SHP Lamp

-

-

Manual

Manual 1,29

f=28-36,2 mm

1,97-2,54:1

-

-

Yes

-


-

-

2,20 kg / 4,85 lbs.

Vertical

-

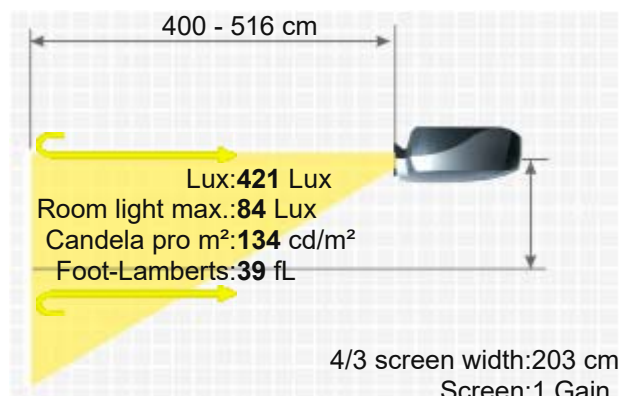

Weight

Keystone

Illumination

Frequenz	-
Foot-Lamberts	39 fL / max. 314 cm screen width
	134 cd/m²
Features	■ Freeze ■ Picture-in-Picture ■ Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/liesegangdigitalvision6100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.