

Liesegang dv 540 flex

LIESEGGANG DV 540 FLEX



The Liesegang model dv 540 flex is an LCD projector with XGA 1024 x 768 resolution and a contrast of 750:1. With the lens shift function, the projector can be positioned very freely. An image width of up to 515 cm is possible, if the image width is smaller (we recommend max. 343 cm), rooms with residual light are also no problem. This model is no longer offered by Liesegang.

 3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector
3500 / 2800 im Eco Mode
750:1 full on/off
4,6667 min. Lumen
Vert.: +50% -0% motorisch
XGA 1024 x 768

Screen
1167 Lux (200 cm Screen width)
750:1 full on/off
1,562 min. Lumen

Resolution
786.432 Pixel
UXGA 1600x1200 compressed

Video Modes
NTSC/PAL(-BGDHI), SECAM, PAL M, N, NTSC4.43, PAL60 525i(480i), 525p(480p), 625i(575i), Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Application
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source
275W UHP Lamp
Article Nr.: ZU0296 04 4010

Light Life
2000 h.

Operating Costs
-

Focus
Powered


Zoom
Powered 1,48

Objective
F=1,7-2,4 f=31-46 mm

Throw Ratio
1,5-2,2:1

Audio
2 x 1W

Connections
DVI M1 DA in
D-sub 15p in und out
5 x BNC RGBHV in
Cinch Stereo in
Cinch Video in
S-Video in
Mini Jack in
RS232C

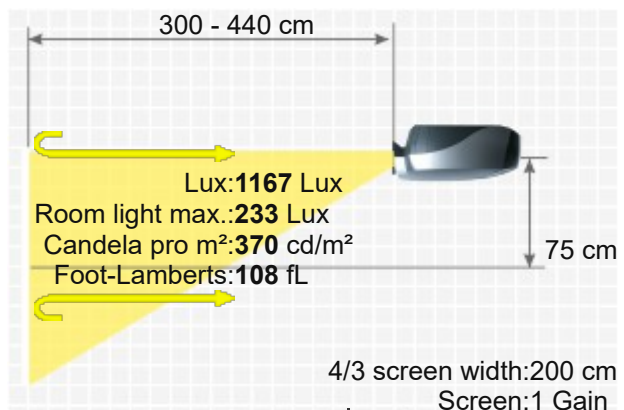

RJ45




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
430W standby 10W
420 x 160 x 320 mm (16,5"x6,3"x12,6") 21,5 L/dm³
39 / 34 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

7,70 kg / 16,98 lbs.
Vert.: +/-15°
Hori.: +/-5°
80%
H-sync: 15,6-91,2 kHz
V-sync: 50-120 Hz
Range max.: 135 MHz
108 fL / max. 515 cm screen width
370 cd/m²

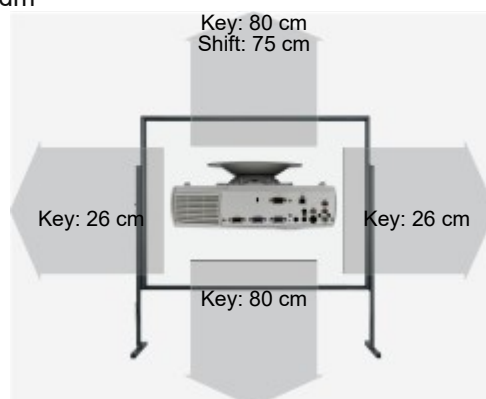

Features

- Lens shift Funktion motorisch
- Freeze
- Blank (Black screen button)
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Picture-in-Picture
- Remote control with laser pointer und mouse control
- Control via web browser
- Lan network compatible.
- Digital Zoom
- Pin Code Security System
- De-interlacer

Screen Mirroring

-

Optional accessories

	Nackte Lampe	NLMP2159	EOL €
	Lampe Ruby	Ruby-LMP2159	144,24 €
	Lampe inkl. Luftfilter Original	ZU0296 04 4010	EOL €
	Kompatible Lampe	LMP-K2159	77,56 €
	Fernbedienung Original	HL02198	EOL €
	Luftfilter Kompatibel Original	NJ08081	18,15 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
OBJV 80-144	3.96-7.26:1	792-1452 m	50%		Powered
OBJV 46-82	2.25-4.13:1	450-826 m	50%		Powered
OBJV 23-31	1.12-1.51:1	224-302 m	50%		Powered
OBJV 16	0.79:1	158 m	0.0% Fix		No Zoom

Status Data 2004 Discontinued (EOL) // Last update of the data: 2026-06-09





HCinema

<https://www.projector-database.com/pro/liesegangdv540flex-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.