

Mitsubishi XD8000/U/L

MITSUBISHI XD8000/U/L



A brief introduction to the XD8000/U/L: The Mitsubishi BrilliantColor DLP projector offers 6500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. 6500 Ansi lumens ensure that a picture width of 702 cm is also possible. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 468 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Playing 1080P is also no problem for the projector. The projector was launched in 2010 and is no longer sold by the manufacturer. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.

Brief Introduction Beta 2.5

Display Type

1 x 0,7" DC3 DDP3020 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

6500

2167 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

3,2500 min. Lumen

1,085 min. Lumen

Lens shift

Vert.: +50% -10% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 330W Lamp

Articel Nr.: VLT-XD80LP

Light Life

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,35

Objective

F=2,0-2,4 f=24,5-33,1 mm

Throw Ratio


1,72-2,33:1

Audio

-

Connections

HDMI 1.3 in
DVI-D mit HDCP in
D-sub 15 pin in

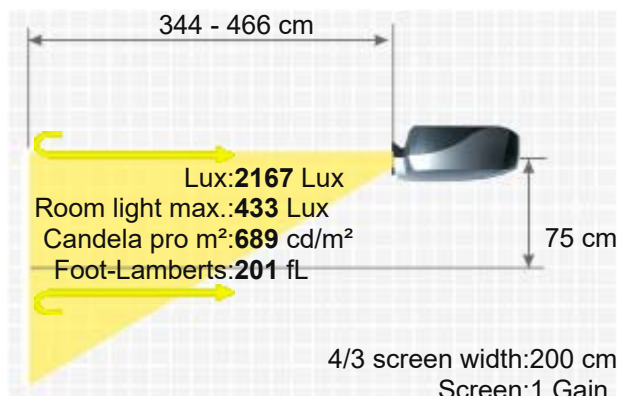

5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C in und out
RJ45 in
Ceiling Mounting Yes
Power 860W
Size WxHxD 490 x 201 x 506 mm (19,3"x7,9"x19,9") 49,84 L/dm³
Operating Noise -


Weight 16,50 kg / 36,38 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-100 kHz
V-sync: 50-95 Hz

Foot-Lamberts 201 fL / max. 702 cm screen width
689 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Edge Blending
- Password protection
- BrilliantColor™
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- Crestron®-Software compatible.

Features

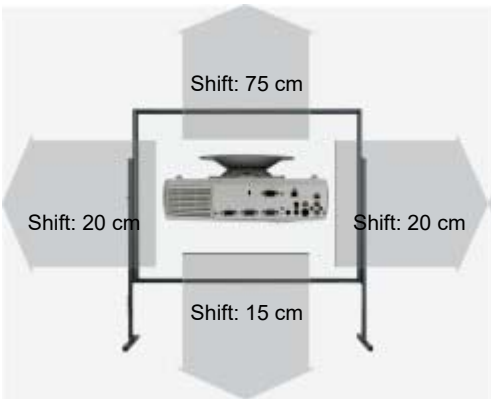

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
OL-XD8000UZ	4.6-8.95:1	9.2-17.9 m	50-10%	+/-10%	Powered
OL-XD8000EZ	0.81-1.01:1	1.6-2 m	50-10%	+/-10%	Powered
OL-XD2000TZ	2.94-4.78:1	5.9-9.6 m	50-10%	+/-10%	Powered
OL-XD2000SZ	1.39-1.9:1	2.8-3.8 m	50-10%	+/-10%	Powered
OL-XD2000LZ	2.33-2.92:1	4.7-5.8 m	50-10%	+/-10%	Powered
Fix Optional Lenses					
OL-XD2000FR	0.82:1	1.6 m	0.0% Fix		No Zoom

Status 2010 Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details



HCinema

<https://www.projector-database.com/pro/mitsubishixd8000-en.html>