

Norxe P10 4K

NORXE P10 4K



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Manufacturer Norxe offers the P10 4K, a stationary DLP LED projector with UHD (4K2K) 3840 x 2160 resolution and a contrast of 1600-10000:1. The manufacturer states that the LED has a lifespan of 100,000 hours, which would be 68.5 years if you watched for 4 hours a day. The brightness of 3000 ANSI lumens makes a screen width of 556 cm possible. In room light, the image should be max. 371 cm wide. Video signals 1080P and 4K are also no problem for the projector.



1 x DLP Panel
HDTV 16/9 Ti Digital Light Processing Chip

Projector

3000

1600-10000:1

0,3000 min. Lumen

Screen

1333 Lux (bei 200 cm Screen)

1600-10000:1

0,833 min. Lumen

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Side-by-Side | Top-and-Bottom

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

SSI,NXL® (+ optional IR LED)

100000 h. to 50%

0,00 € LED

Powered

Powered

optional

optional

Nein

2x DisplayPort 1.4

HDMI 2.0 in

2x BNC (sync/trigger) 1x Mini DIN

USB in


RJ45 in

Yes, is possible.

325W

485 x 216,75 x 405 mm (19,1"x8,5"x15,9") 42,43 L/dm³

32dB

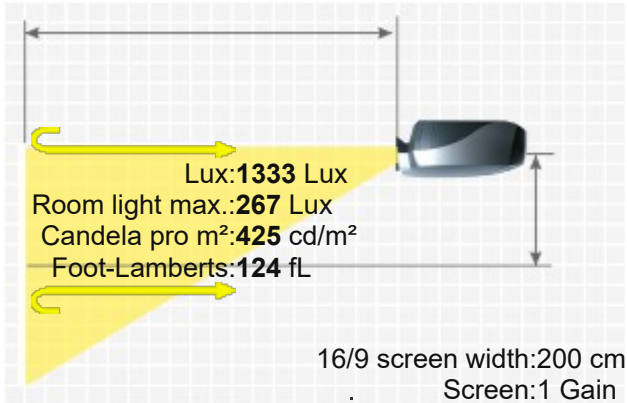

Weight	18,50 kg / 39,68 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	124 fL / max. 556 cm screen width 425 cd/m²
Features	■ Full HD 1080P compatible
	■ Warping
	■ 24/7 continuous operation capable
	■ Password protection
	■ Lan network compatible.
Screen Mirroring	■ Unify™ electronics platform
	-

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
N4	1.35-2.27:1	2.7-4.5 m	+/-104%	+/-75.8%	Powered
N2	1.05-1.4:1	2.1-2.8 m	+/-116%	+/-75%	Powered
N1	0.7-1.09:1	1.4-2.2 m	+/-53%	+/-51%	Powered
Fix Optional Lenses					
N3	0.55:1	1.1 m	+/-87%	+/-63%	No Zoom
Status	2024 Current model // Last update of the data: 2025-03-03				



More Details



HCinema

<https://www.projector-database.com/pro/norxep104k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.