


Optoma ProScene ZU920T

OPTOMA PROSCENE ZU920T

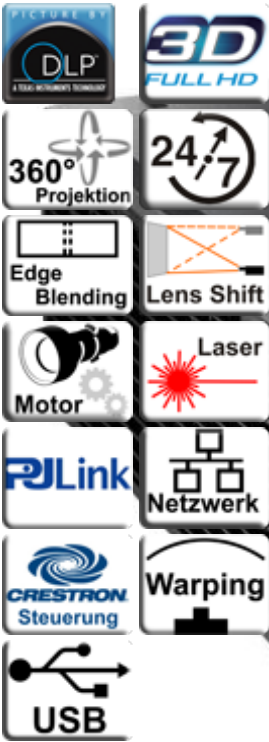

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Disc Recognition

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The Optoma ProScene ZU920T 3D Laser DLP short-throw projector has 8,200 ANSI lumens, a contrast ratio of 300,000 0:1, and a WUXGA 1920 x 1200 resolution. It is a laser projector with a 30,000-hour lamp life, which would equate to over 20.5 years at 4 hours of use per day. It includes lens shift and keystone correction functions, which provide flexibility during installation. This projector has a throw ratio of just 1.25:1. To project a 2-meter-wide image, the projector needs to be positioned just 250 cm from the screen. If the image width is insufficient, the projector offers built-in edge blending software, which allows multiple projectors to combine their images to create a single large image. Furthermore, it supports Full HD 1080p and 4K (compressed) and 3D, meaning it can recognize all currently available Blu-ray formats.



1 x DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Projector

8200

3000000:1

0,0027 min. Lumen

Vert.: +/-55% Hori.: +/-25%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (komprimiert)

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Short Distance | Very large screen width and rooms with plenty of light and shaded daylight.

DuraCore Laser

30000 h.

0,00 € Laser

Powered

Powered x1,6

f=18,72-29,59 mm

1,25-2,0:1

2 x 10W


2x HDMI in
3D Sync
D-sub 15pin in und out
S-Video in
Mini Jack Audio in und out

Screen

3644 Lux (200 cm Screen width)

3000000:1

0,001 min. Lumen

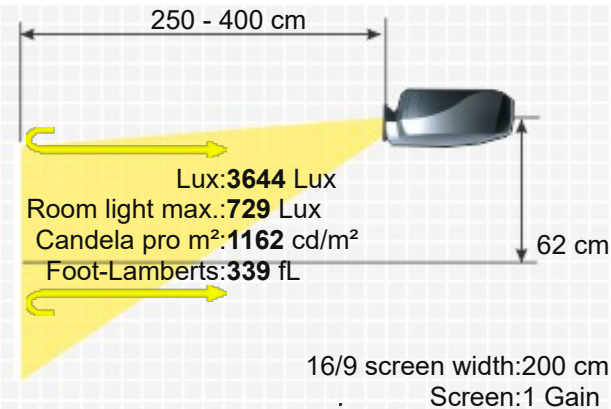

USB in
RS232C Din 9 pin in
RJ45 in
12 V Trigger




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
505W / 260W ECO
486 x 176 x 432,5 mm (19,1"x6,9"x17") 36,95 L/dm³
38 / 36 dB in Eco Mode

Weight
Keystone
Illumination

14,00 kg / 30,86 lbs.
Vert.: +/-30°
Hori.: +/-30°
95%

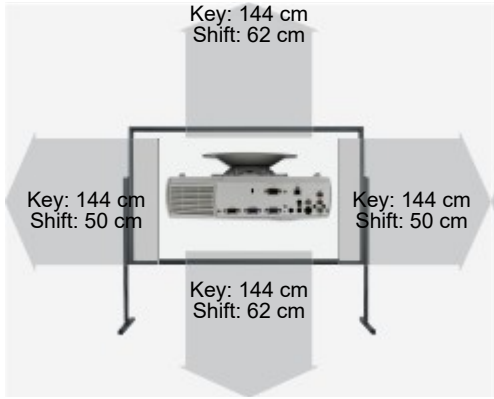

Frequenz
Foot-Lamberts

-
339 fL / max. 920 cm screen width
1162 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- Password protection
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- Integrated warping and edge blending processor
- AMX
- Telnet
- Wired remote control port

Screen Mirroring

-

Optional accessories

	Fernbedienung Original	BR-3074W / SP.72N03GC01	44,33 €
	Deckenhalterung weiß	Halterung45W	83,60 €

Status
2021 Current model // Last update of the data: 2026-06-29
Created: 2026-03-19 14:29:22



More Details



HCinema

<https://www.projector-database.com/pro/optomaproscenezu920t-en.html>