

Optoma X605



OPTOMA X605



The Optoma X605 3D DLP projector has 6000 Ansi lumens, a contrast of 2000:1 / 10000:1 and an XGA 1024 x 768 resolution. The projector also offers a lens shift function that makes image adjustment child's play. The projector can illuminate images up to 675 cm wide thanks to its 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 450 cm. The projector can also play 1080P and 3D without any problems. The model built in 2014 is no longer offered by Optoma, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 6000

Screen 2000 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off / 10000:1 full on/off

Screen 2000:1 full on/off / 10000:1 full on/off

Black Level

0,6000 min. Lumen

Screen 1 min. Lumen

Lens shift

Vert.: +60% -20% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

370W Lamp

Articel Nr.: 5811118128-SOT / BL-

FP370A

Light Life

1500 h. 3500 h. in eco Mode

Operating Costs

7,62% / 0,25 €

Focus

Powered

Zoom

Powered 1,25

Objective

F=2,46-2,56 f=22,8-28,5 mm

Throw Ratio

1,6-2,0:1

Audio

2 x 3W

Connections

HDMI 1.4b in

DVI-D in

2 x D-sub 15pin in 1 x out

5 x BNC RGBHV in

Cinch Video in

Cinch Stereo in

S-Video in


Mini Jack Audio in und out

USB in

RS232C Din 9 pin in

RJ45 in

12V Trigge rout

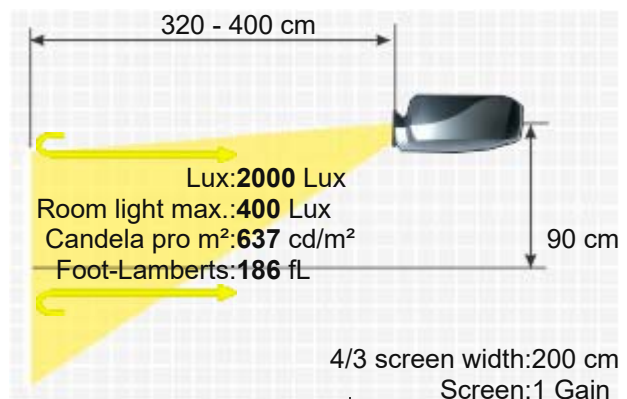



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
460W
430 x 183 x 340 mm (16,9"x7,2"x13,4") 26,75 L/dm³
37dB

Weight
Keystone
Illumination

8,60 kg / 18,96 lbs.
Vert.: +/-20°
85%

Frequenz

H-sync: 15-91 kHz
V-sync: 24-85 Hz

Foot-Lamberts


186 fL / max. 675 cm screen width
637 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- Dicom Simulation

Optional

Remote control original BR-3070L, SP.72101GC01
Lamp original 5811118128-SOT / BL-FP370A
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22058>

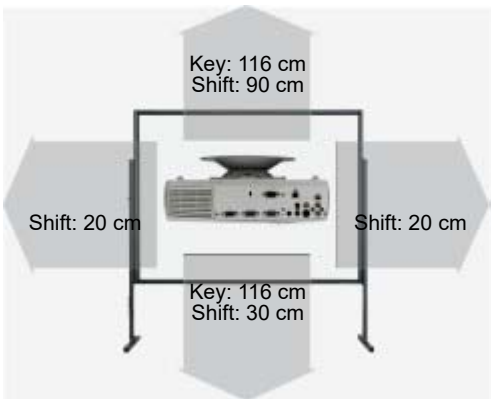

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Standard	1.6-2:1	3.2-4 m	60-20%	+/-10%	Powered
Semi short	1.14-1.35:1	2.3-2.7 m			Powered
Long	2-3:1	4-6 m	60-20%	+/-10%	Powered
Extra long	3.11-5.18:1	6.2-10.4 m	60-20%	+/-10%	
Fix Optional Lenses					
Short	0.8:1	1.6 m	0.00% Fix		No Zoom

Status
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-06-25 10:19:19

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomax605-en.html>