

Panasonic PT D3500E/U

PANASONIC PT D3500E/U



Brief Introduction

Beta 2.5

A brief introduction to the Panasonic PT D3500E/U. The stationary DLP projector has an XGA 1024 x 768 resolution and a contrast of 1600:1 / 800:1 contrast mode normal. The integrated lens shift gives freedom when positioning the projector. 3500 Ansi lumens ensure that a picture width of 515 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. On the market since 2005, the model is no longer offered by the manufacturer Panasonic.

 1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

3500

Contrast

1600:1 / 800:1 Kontrastmode normal

1167 Lux (200 cm Screen width)

Black Level

2,1875 min. Lumen

1600:1 / 800:1 Kontrastmode normal

Lens shift

Vert.: +50% -0% Hori.: +/-10% motorisch

0,731 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

300W UHM Lamp

Article Nr.: ET-LAD35

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,36

Objective

F=1,7-2,0 f=25,6-33,8 mm

Throw Ratio

1,79-2,37:1

Audio

-

Connections

DVI-D mit HDCP

5 x BNC RGBHV in


2 x D-sub 15pin in 1 x out

Cinch Video in

2 x Cinch Stereo in

S-Video in

RJ45

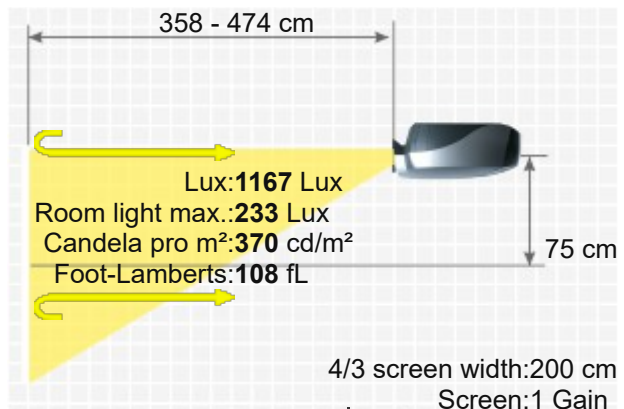

Mini Jack RS232C



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
410W / 10W standby
332 x 168 x 425 mm (13,1"x6,6"x16,7") 23,7 L/dm³
29 dB in Eco Mode

Weight
Keystone
Illumination

7,90 kg / 17,42 lbs.
Vert.: +/-30°
-

Frequenz

H-sync: 15-91 kHz
V-sync: 50-85 Hz
Range max.: 108 MHz

Foot-Lamberts


108 fL / max. 515 cm screen width
370 cd/m²

- Direkt Power Off
- Lens shift Funktion motorisch
- Freeze
- Eco Mode
- Kensington Slot
- 360° installable
- Password protection
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- digital zoom
- 6 segments, Genoa colour wheel

Features

Screen Mirroring

-

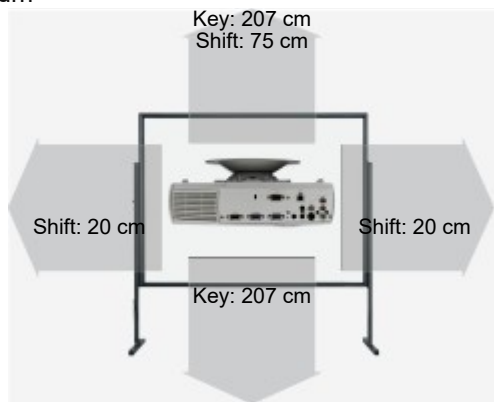

Optional accessories

	Nackte Lampe	NLMP2670	160,04 €
	Lampe Ruby	Ruby-LMP2670	157,91 €
	Economy Lampe Original	ET-LAD35L	EOL €
	Lampe inkl. Luftfilter Original	ET-LAD35 / ET-LAD35H	EOL €
	Kompatible Lampe	LMP-K2670	81,88 €
	Objektiv Gebraucht Original	ET-DLE200	EOL €
	Objektiv Gebraucht Original	ET-DLE400	1.235,64 €
	Fernbedienung Original	N2QAEA000023	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
ET-DLE410	4.56-8.52:1	912-1704 m	50%	+/-10%	Powered
ET-DLE400	5.79-8.1:1	1158-1620 m	50%	+/-10%	Powered
ET-DLE300	3.91-6.06:1	782-1212 m	50%	+/-10%	Powered
ET-DLE310	3.43-4.48:1	686-896 m	50%	+/-10%	Powered

ET-DLE200	2.48-4.06:1	496-812 m	50%	+/-10%	Powered
ET-DLE100	1.36-1.83:1	272-366 m	50%	+/-10%	Powered
ET-DLE050	0.82:1	164 m	0.0% Fix	+/-10%	No Zoom
Status	2005 Discontinued (EOL) // Last update of the data: 2026-06-09				

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptd3500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.