

Panasonic PT RQ13K

PANASONIC PT RQ13K



A brief introduction to the PT RQ13K: The Panasonic large-format laser DLP projector offers 10000 Ansi lumens, a contrast of 20000:1 and a WQXGA 2560 x 1600 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. Including a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 10000 Ansi lumens, a picture width of 871 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 581 cm). If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. The model is also Full HD 1080P compatible and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection. The projector was launched in 2015 and is no longer sold by the manufacturer, but is still very popular in our projector database.

Brief Introduction
Beta 2.5

Display Type

3 x 0,95" DLP Chip
WQXGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

10000

3333 Lux (bei 200 cm Screen)

Contrast

20000:1 full on/off

20000:1 full on/off

Black Level

0,5000 min. Lumen

0,167 min. Lumen

Lens shift

Vert.: +/-68% Hori.: +/-29%

Resolution

WQXGA 2560 x 1600

Video Modes

4.096.000 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Dual-laser bank system

Light Life

Article Nr.: N2QAYB001052

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio


Nein

Connections

DIGITAL LINK
2 x SDI-In (BNC)

Ceiling Mounting

Yes, is possible.

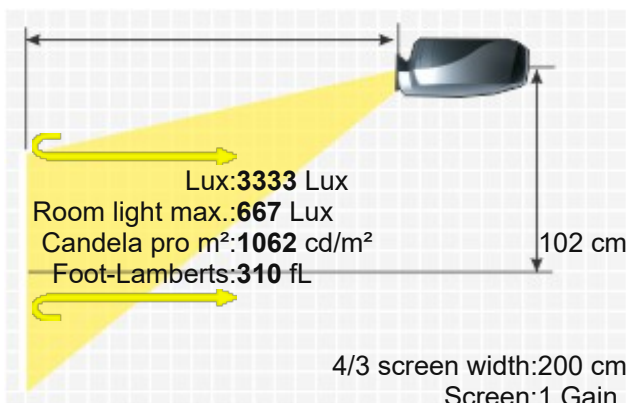

Power 1270W
Size WxHxD 578 x 324 x 710 mm (22,8"x12,8"x28") 132,96 L/dm³
Operating Noise -

Weight 43,00 kg / 94,8 lbs.
Keystone Vert.: +/-40°
Hori.: +/-15°


Illumination -

Frequenz -

Foot-Lamberts 310 fL / max. 871 cm screen width
1062 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - 360° installable
 - 24/7 continuous operation capable
 - Edge Blending
 - Liquid cooled system
 - DICOM simulation mode
 - REC709 mode
 - Picture-in-picture and side-by-side

Screen Mirroring -

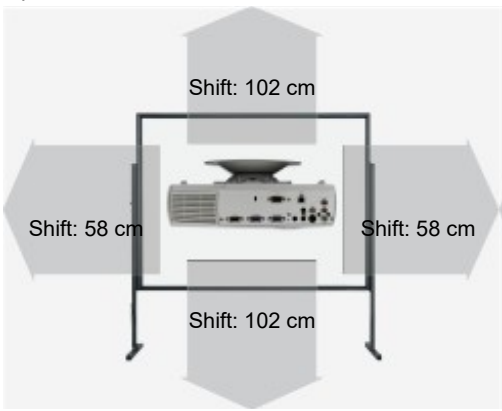

Optional accessories			
	Luftfilter Kompatibel	Alternative zu:ET-EMF330	90,74 €
	Objektiv Original	ET-D75LE8	11.301,03 €
	Objektiv Original	ET-D75LE6	EOL €
	Objektiv Original	ET-D75LE50	6.703,67 €
	Objektiv Original	ET-D75LE30	3.991,38 €
	Objektiv Original	ET-D3LEW50	6.317,58 €
	Objektiv Original	ET-D3LEW200	EOL €
	Objektiv Original	ET-D3LEU100	48.774,98 €
	Objektiv Original	ET-D75LE40	5.273,78 €
	Objektiv Original	ET-D75LE10	5.273,02 €
	Objektiv Original	ET-D75LE20	3.711,02 €
	Fernbedienung Original	N2QAYB001052 / N2QAYB001176	107,64 €
	Rauch-Luftfilter Original	ET-SFR330	354,48 €
	Luftfilter Original	ET-EMF330	230,44 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-D75LE8	8.2-15.4:1	16.4-30.8 m	+/-68%	+/-29%	Powered
ET-D75LE6	1-1.2:1	2-2.4 m	+/-56%	+/-19%	Powered

ET-D75LE40	5.1-8.2:1	10.2-16.4 m	+/-68%	+/-29%	Powered
ET-D75LE30	2.7-5.2:1	5.4-10.4 m	+/-68%	+/-29%	Powered
ET-D75LE20	1.8-5.2:1	3.6-10.4 m	+/-68%	+/-29%	Powered
ET-D75LE10	1.4-1.9:1	2.8-3.8 m	+/-68%	+/-29%	Powered
ET-D3LEW201	0.65-0.85:1	1.3-1.7 m			Powered
ET-D3LEW200	0.65-0.85:1	1.3-1.7 m			Powered

Fix Optional Lenses

ET-D75LE90	0.4:1	0.8 m	74--84%	16-12%	No Zoom
ET-D75LE50	0.8:1	1.6 m	50% Fix		No Zoom
ET-D3LEW50	0.75:1	1.5 m			No Zoom
ET-D3LEU101	0.4:1	0.8 m			No Zoom
ET-D3LEU100	0.4:1	0.8 m			No Zoom

Status2015 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2015-02-10 14:37:04

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrq13k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.