Prolight PLF601VX



PROLIGHT PLF601VX

Brief Introduction Beta 2.5	A brief introduction to the PLF601VX: The Prolight LCD projector offers 1700 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. An image width of up to 359 cm is possible as the projector has 1700 Ansi lumens. However, if room light is available, the picture should be max. 239 cm wide. The model built in 2006 is no longer offered by Prolight.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 1700 / Screen: 567 Lux (bei 200 cm Screen)
Contrast	Projector: 450:1 full on/off / Screen: 450:1 full on/off
Black Level	Projector: 3,7778 min. Lumen / Screen: 1,268 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	165W Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	2,03-2,5:1
Audio	1 x 2W
Connections	D-sub 15pin in und out Cinch Video in S-Video in Mini Jack RS232C
Ceiling Mounting	Yes
Power	230W
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
Operating Noise	37dB
Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	53 fL / max. 359 cm screen width 182 cd/m²
Features	-
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04

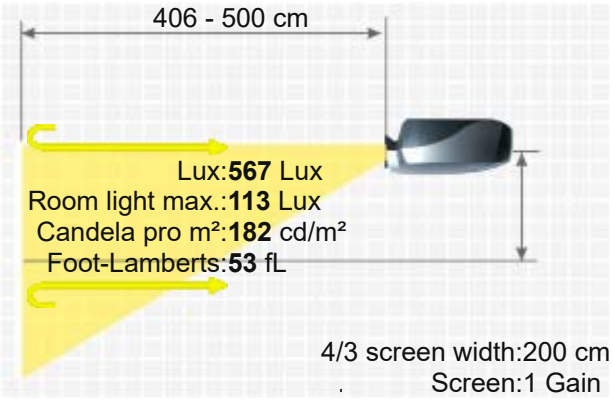

Data

More Details



HCinema
https://www.projector-database.com/pro/prolightPLF601VX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.