
Prolight PLF700VX



Brief Introduction Beta 2.5	With the PLF700VX, manufacturer Prolight offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. An image width of up to 375 cm is possible. However, the image should be smaller in room light. We recommend max. 250 cm. The model is no longer offered by Prolight.	
Display Type	3 x 0,7" LCD TFT Panel XGA 4/3 Liquid Crystal Display	
Ansi-Lumen	Projector: 1850	Screen: 617 Lux (bei 200 cm Screen)
Contrast	Projector: 450:1 full on/off	Screen: 450:1 full on/off
Black Level	Projector: 4,1111 min. Lumen	Screen: 1,38 min. Lumen
Offset	-	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed	
Video Modes	PAL, SECAM, NTSC	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source	165W EHPL Lamp	
Light Life	2000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,23	
Objective	F=1,7-2,1 f=26-32 mm	
Throw Ratio	1,8-2,3:1	
Audio	1 x 2W	
Connections	D-sub 15pin in und out Cinch Video in S-Video in Mini Jack USB RS232C	
Ceiling Mounting	Yes	
Power	230W	
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³	
Operating Noise	37dB	
Weight	3,10 kg / 6,83 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz	
Foot-Lamberts	57 fL / max. 375 cm screen width 195 cd/m²	

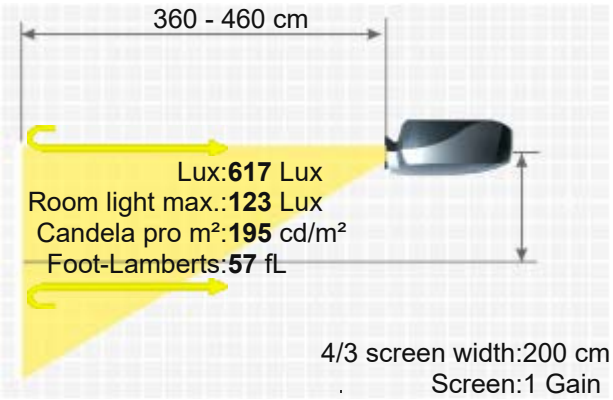

PROLIGHT PLF700VX

Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema
https://www.projector-database.com/pro/prolightPLF700VX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.