Prolight PLF882BX



3LCD USB

Brief Introduction Beta 2.5	The standard portable Prolight PLF882BX LCD projector has 2200 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. 2200 Ansi lumens ensure that a picture width of 408 cm is also possible. However, if room light is available, the picture should be max. 272 cm wide. It is no longer offered by the manufacturer Prolight.
Display Type	3 x 0,79" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector		Screen
Ansi-Lumen	2200		733 Lux (bei 200 cm Screen)
Contrast	450:1 full on/off		450:1 full on/off
Black Level	4,8889 min. Lumen		1,64 min. Lumen
Offset	-		

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	1,6-2,0:1
Audio	1 x 2W
Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	250W
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
Operating Noise	37dB

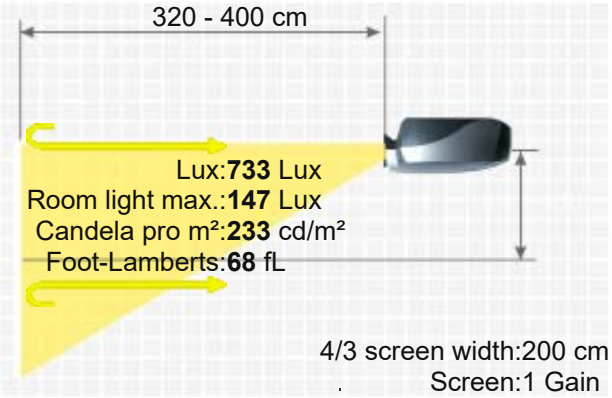

Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	68 fL / max. 408 cm screen width

PROLIGHT PLF882BX

	233 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

https://www.projector-database.com/pro/prolightPLF882BX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.