

Desktop Projector™ 5800

value and performance

LOOK SHARP

SVGA resolution (with XGA scaling)
makes images big, bold, and beautiful

SMART ENOUGH TO SHARE

two computer and two video inputs
accommodate multiple presenters

LIGHTS ON PROJECTION

650 ANSI lumens make it bright enough to
use anywhere

LONG LASTING

metal halide lamp with extra long life
keeps maintenance cost down

ZOOM IN, ZOOM OUT

motorized 1.5:1 zoom and focus give
the ultimate in projection flexibility



actual size: 16.3 in. W x 12.5 in. L x 6.2 in. H

FREEDOM TO ROAM


front and rear IR ports make remote
operations easy from anywhere in the room

DESKTOP PROJECTOR 5800

At 650 lumens and 19 pounds, the DP5800 is well-suited to frequently used fixed installations such as training, meeting, and boardrooms.


- projects images big enough for large training rooms or small auditoriums
- SVGA (800 x 600) resolution ensures that your presentation will look crisp and clear every time
- bright enough to use virtually anywhere—even with the lights on
- motorized 1.5:1 lens offers a wide range of zoom settings
- with NTSC, PAL, and SECAM video support and international power supply, you can take it anywhere in the world
- Laser F/X™ remote control with built-in laser pointer puts you in command of the projector, the computer—and your audience
- perfect for the value-conscious consumer: educational, government, military, and facility-wide implementations in large corporations

PROXIMA®
MULTIMEDIA PROJECTORS




DP5800

DP5800 Set Up

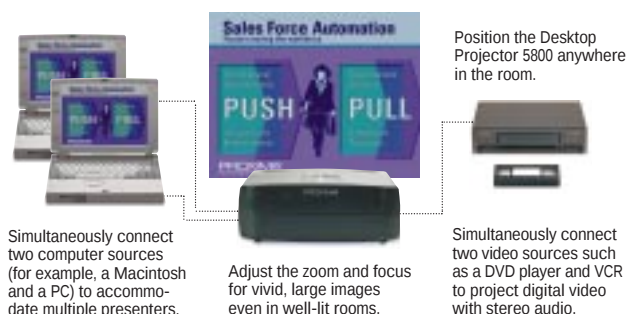

DP5800 Projection Distances/Image Sizes

Projection Distance		Image Size (Diagonal)			
		Minimum		Maximum	
3.9'	1.2 m	1.7'	0.5 m	2.6'	0.8 m
5.0'	1.5 m	2.2'	0.7 m	3.3'	1.0 m
10.0'	3.0 m	4.4'	1.4 m	6.7'	2.0 m
15.0'	4.6 m	6.7'	2.0 m	10.0'	3.0 m
25.0'	7.6 m	11.1'	3.4 m	16.7'	5.1 m
50.0'	15.2 m	22.2'	6.8 m	33.3'	10.2 m
100.0'	30.5 m	44.4'	13.6 m	66.7'	20.3 m

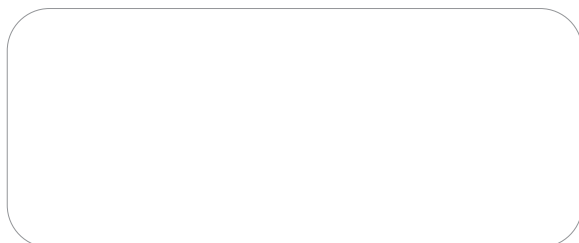

PROXIMA®
MULTIMEDIA PROJECTORS

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298,
(619) 457-5500, FAX (619) 457-9647, (800) 447-7692 (U.S. and Canada)

European Office: K.G. Meldahlsvei 9, Postboks 1403,
N-1602 Fredrikstad, Norway, +47 69 34 01 55, FAX +47 69 34 06 32

www.proxima.com

www.presentersuniversity.com

1 Wireless speakers are not available in certain markets.

Proxima is a registered trademark of Proxima Corporation and Desktop Projector is a trademark of Proxima Corporation. Other trademarks are the property of their respective owners.
©1999 Proxima Corporation. All rights reserved. Specifications are subject to change without notice. Lumen and lamp life may vary depending on lamp manufacturer.

03/99 70 9-00501-7 DP5800 datasheet.qxd

WHAT'S INCLUDED

Model DP5800 includes:

- Wireless remote control (and two AA batteries)
- U.S., UK, and European power cords
- Product documentation
- Lens cap
- Computer video cable, computer mini-plug to mini-plug audio cable, Mac adapter, PC control cable, PS/2 control cable, ADB control cable, AV cable, S-Video cable

ORDERING INFORMATION

Model Number

DP5800

For worldwide use

Optional Accessories

CASE-001	Carry-on rolling soft case
CASE-013	Rolling hard case (checkable/shippable)
CASE-014	Carry-on rolling hard case (checkable/shippable)
A58¹	AC/DC wireless boardroom speaker system
A59¹	AC/DC wireless portable speaker system

TECHNICAL SPECIFICATIONS

Computer Compatibility	- IBM PC, PS/2, Pentium and compatibles - Apple Macintosh, Power Macintosh, PowerBook and compatibles
Video Compatibility	NTSC, PAL, SECAM, S-Video
Sources	2 computer 2 video 2 S-video - stereo audio
H-Sync Range	15 to 57 KHz
V-Sync Range	50 to 75 Hz
Brightness	650 ANSI lumens (typical)
Contrast Ratio	100:1
Display Technology	1.3 in. polysilicon active-matrix TFT (Thin Film Transistor) x3
Resolution	SVGA (800 x 600)
Resolutions Supported	VGA (640 x 480), SVGA (800 x 600), XGA (1024 x 768, scaled), Mac 13, Mac 16
Keystone Correction	8.8°
Number of Colors	16.7 million
Image Size (Diagonal)	1.7 ft (0.5 m) to 66.7 ft (20.3 m)
Lens	- Motorized zoom lens 1.5:1 ratio - Focal length: 48mm to 72mm, f/2.3 to f/3.0
Projection Distance (From Screen)	3.9 ft (1.2 m) to 100 ft (30.5 m)
Lamp	260 watt metal halide - Lamp life: 2000 hours to 50% brightness
Audio	2w + 2w stereo speakers with 2-watt stereo speaker output jack (mini-jack)
Remote Control	Includes zoom and focus control, and joystick mouse control
Approvals	FCC Class A, CE, UL, cUL, TÜV
Power Consumption	370 watts
Power Requirements	Auto switching 90 to 132 VAC, 198 to 264 VAC, 50/60 Hz
Operating Temperature (Sea Level)	32° F (0° C) to 95° F (35° C)
Weight	19 lb (8.6 kg)
Dimensions	16.3 in. (W) x 12.5 in. (L) x 6.2 in. (H) 41.5 cm (W) x 31.7 cm (L) x 15.7 cm (H)
Warranty	One year on parts and labor (excluding lamp)

