

Ricoh K120



RICOH K120



Brief Introduction

Beta 2.5

The K120 DLP has 2800 Ansi lumens, a contrast of 2200:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 461 cm well. However, if room light is available, the image width should ideally not exceed 307 cm. The model built in 2014 is no longer offered by Ricoh.



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2800

933 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

1,2727 min. Lumen

0,425 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W Lamp

Light Life

Articel Nr.: 308883 / type 2

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

-

Throw Ratio

1,95-2,15:1

Audio

1 x 2W

Connections

HDMI in
D-sub 15pin in und out
Cinch Video in
S-Video in
Mini Jack Audio in
USB Typ B in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power

258W

Size WxHxD

286 x 100 x 208 mm (11,3"x3,9"x8,2") 5,95 L/dm³

Operating Noise

37 / 32 dB in Eco Mode

Weight

2,50 kg / 5,51 lbs.

Keystone


-

Illumination

-

Frequenz

-

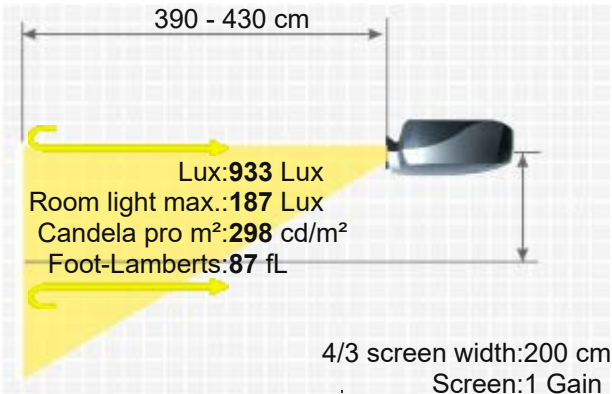

Foot-Lamberts

87 fL / max. 461 cm screen width

298 cd/m²

Features

■ Eco Mode

■ Lan network compatible.

Status

2014 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details



HCinema

<https://www.projector-database.com/pro/ricohpj120-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.