

Roverlight Vision DX1000 PRO



ROVERLIGHT VISION DX1000 PRO



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" / 12° DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1000

324 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

0,5000 min. Lumen

0.162 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

HDTV480p - 1080i VideoNTSC , PAL , SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W UHP Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,44-2,69

Throw Ratio

-

Audio

2 x 3W Stereo

Connections

1 RGB input (D-sub 15 pins× 1), 1 DVI (Digital Visual Interface), 1 audio inputs (Stereo mini jack× 1), 1 audio (RCA L&R× 2), 1 PS/2 connectivity (Centronic 8 pins), 1 component video input (Y Cb Cr× 1, via RGB), 1 S-Video input (mini DIN/4 pins× 1), 1 composite video input (RCA× 1), 1 RGB outputs (D-sub 15 pins× 1), 1 audio outputs (Stereo mini jack× 1), RS232, 12V relay



Ceiling Mounting

Yes

Power

-

Size WxHxD

277 x 85 x 225 mm (10,9"x3,3"x8,9") 5,3 L/dm³

Operating Noise

-

Weight


2,90 kg / 6,39 lbs.

Keystone

-

Illumination

90%

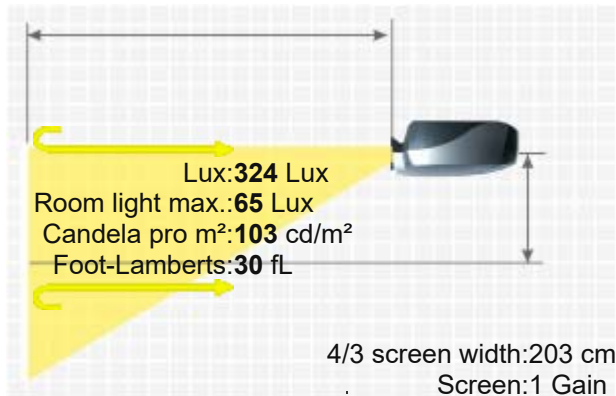

Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz
Foot-Lamberts	30 fL / max. 275 cm screen width 103 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/roverlightvisiondx1000pro-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.