

Runco VX 11d

RUNCO VX 11D



Brief Introduction

Beta 2.5

The VX 11d DLP has 2100 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 2100 Ansi lumens, a picture width of 466 cm is possible. In room light, the image should be max. 311 cm wide. Playing 1080P is also no problem for the projector. It was launched in 2011 and is no longer offered by the manufacturer Runco, but is still very popular in our projector database.

Display Type



3 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2100

933 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,2100 min. Lumen

0,093 min. Lumen

Lens shift

Vert.: +62% -32% Hori.: +/-12%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

260W Lamp

Article Nr.: 997-5353-00

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

Anschlüsse über Videoprozessor.

Ceiling Mounting

Yes, is possible.

Power

400W

Size WxHxD

537 x 235 x 641 mm (21,1"x9,3"x25,2") 80,89 L/dm³

Operating Noise

-

Weight

25,20 kg / 55,56 lbs.

Keystone

-

Illumination



90%

Frequenz

-

Foot-Lamberts

87 fL / max. 466 cm screen width
298 cd/m²

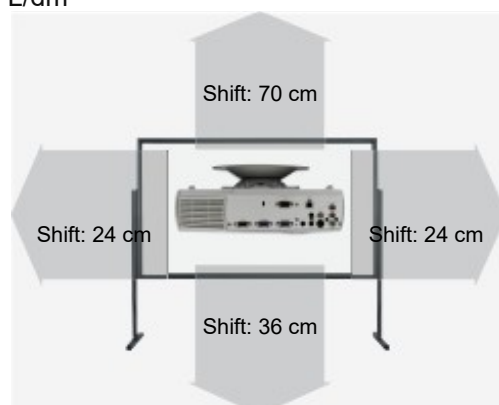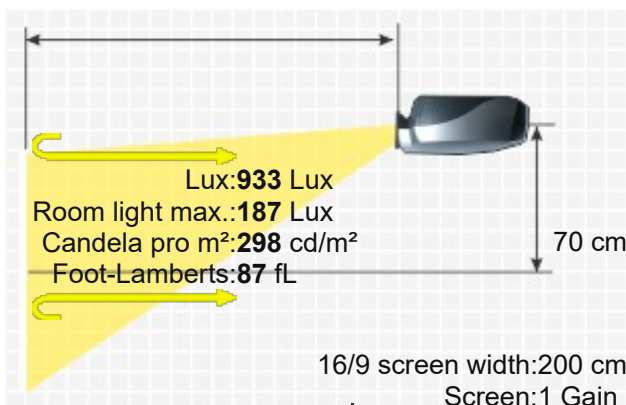

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- External video processor included.

Features

Screen Mirroring

-

Optional accessories

	Nackte Osram Lampe	NLMP18352	113,74 €
	Lampe Ruby	Ruby-LMP18352	201,94 €
	Lampe Original	997-5353-00	EOL €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Proteus 6	4.34-6.76:1	8.7-13.5 m	+/-65%	+/-30%	Powered
Proteus 5	2.9-4.34:1	5.8-8.7 m	+/-65%	+/-30%	Powered
Proteus 4	2.17-2.9:1	4.3-5.8 m	+/-65%	+/-30%	Powered
Proteus 3	1.74-2.17:1	3.5-4.3 m	+/-65%	+/-30%	Powered
Proteus 2	1.45-1.74:1	2.9-3.5 m	+/-65%	+/-30%	Powered
Fix Optional Lenses					
Proteus 1	0.77:1	1.5 m	0.00% Fix		No Zoom

Status Data 2011 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/runconvx11d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.