


Runco VX 33i



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

The VX 33i DLP projector from Runco has 3480 Ansi lumens, a contrast of 2000:1 Ansi contrast and a HDTV 1920 x 1080 resolution. With the lens shift function, the projector can be positioned very freely. 3480 Ansi lumens ensure that a picture width of 599 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 399 cm. It is also Full HD 1080P compatible. On the market since 2009, the model is no longer offered by the manufacturer Runco, but is still very popular in our projector database.



3 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector

3480 / 7125 max.

2000:1 Ansi Kontrast

1,7400 min. Lumen

Vert.: +62% -32% Hori.: +/-12%

HDTV 1920 x 1080

2.073.600 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

High-End Homecinema | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

300W Lamp

Article Nr.: 151-1042-00

2000 h.

-

Powered

Powered

optional

optional

Nein

2 x HDMI in

D-sub 15 pin in

S-Video in

Cinch Video in

Yes, is possible.

570W

528 x 255 x 756 mm (20,8"x10"x29,8") 101,79 L/dm³

-

45,00 kg / 99,21 lbs.

-


-

Screen

1547 Lux (bei 200 cm Screen)

2000:1 Ansi Kontrast

0,774 min. Lumen

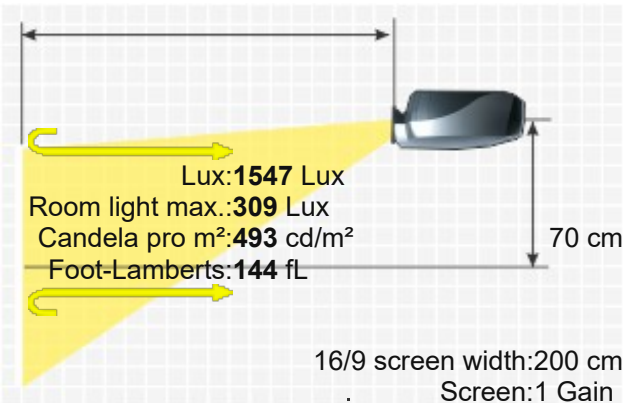

Frequenz -

Foot-Lamberts 144 fL / max. 599 cm screen width

493 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Gamma correction
- Overscan adjustable

Screen Mirroring -



Optional accessories

	Nackte Lampe	NLMP22109	109,18 €
	Lampe Ruby	Ruby-LMP22109	169,11 €
	Lampe Original	151-1042-00	EOL €
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
E: Zoom 4.30 – 7.00	4.3-7:1	8.6-14 m	63-30%	+/-12%	
D: Zoom 2.57 – 4.20	2.57-4.2:1	5.1-8.4 m	65-28%	+/-12%	Powered
C: Zoom 1.85 – 2.53	1.85-2.53:1	3.7-5.1 m	62-32%	+/-12%	Powered
B: Zoom 1.40 – 1.81	1.4-1.81:1	2.8-3.6 m	61-30%	+/-12%	Powered
Fix Optional Lenses					
A-2: Fixed 1.155	1.16:1	2.3 m	71-31%	+/-17%	No Zoom
A-1: Fixed 0.70	0.7:1	1.4 m	+/-10%	+/-5%	No Zoom

Status Data 2009 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/runcovx33i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.