

Sanyo PLC XP50E/L

SANYO PLC XP50E/L



Brief Introduction

Beta 2.5

A brief introduction to the PLC XP50E/L: The Sanyo LCD projector offers 3600 Ansi lumens, a contrast of 750:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 3600 Ansi lumens, an image width of 523 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 349 cm). The model was built by Sanyo in 2003 and is no longer current.

Display Type

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3600

Contrast

750:1 full on/off

Black Level

4,8000 min. Lumen

Lens shift

Vert.: +50% -0% motorisch

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, NTSC4.43, PAL-M/N HDTV 1080i, 720p 480p 1035i

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

300W NSH Lamp

Light Life

Article Nr.: 610 306 5977

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,3

Objective

f=48,2-62,6 mm / EL optional

Throw Ratio

1,8-2,3:1

Audio

2W Stereo

Connections

DVI-D

D-sub 15pin in oder out

5 x BNC RGBHV in

YUV in

Cinch Video in

Cinch Stereo in


S-Video in

Screen

1200 Lux (200 cm Screen width)

750:1 full on/off

1,606 min. Lumen

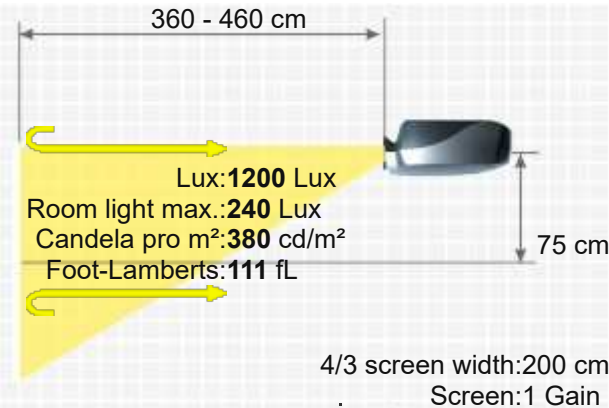

Mini Jack

USB Typ B

RS232C

Kabelfernbedienung

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes, is possible.

450W standby 15W

319 x 168 x 430 mm (12,6"x6,6"x16,9") 23,04 L/dm³

39 / 35 dB in Eco Mode

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

9,20 kg / 20,28 lbs.

Vert.: +/-40°

Hori.: +/-10°

90%

H-sync: 15-100 kHz

V-sync: 50-100 Hz

Range max.: 160 MHz

111 fL / max. 523 cm screen width

380 cd/m²

- Lens shift Funktion motorisch

■ Freeze

■ User logo

■ Eco Mode

■ Kensington Slot

■ Gamma correction

■ Remote control with laser pointer und mouse control

■ Optional Wi-Fi network compatible.

■ Optional LAN network compatible.

■ Auto Picture Control


■ Digital Zoom

■ Colour Management System

■ De-interlacer with 3:2 pulldown

■ RJ45 optionally via Net Work Manager model POA-PN01
- Features

Screen Mirroring
- -

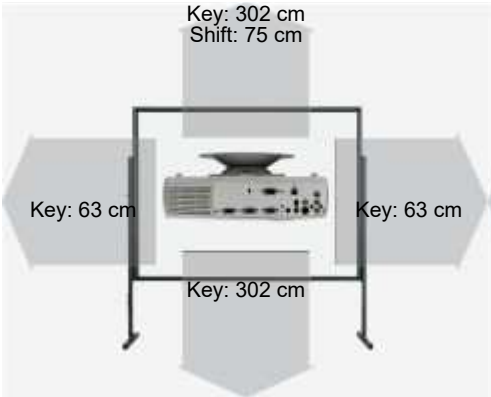

Screen Mirroring

-

Optional accessories			
	Nackte Lampe	NLMP3430	89,55 €
	Lampe Ruby	Ruby-LMP3430	134,21 €
	Lampe Original	610-306-5977 / LMP67 / ET-SLMP67	EOL €
	Kompatible Lampe	LMP-K1351	79,83 €
	Objektiv Original	ET-ST31A / LNS-T31A	EOL €
	Objektiv Original	ET-ST32 / LNS-T32	EOL €
	Objektiv Original	ET-SW31A / LNS-W31A	EOL €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	945 060 2239	EOL €
	Luftfilter (klein) Original	POA-FIL-130-k / 910 303 8781	EOL €
	Luftfilter (gross) Original	POA-FIL-130-g / 910 303 8774	EOL €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
LNS-T32	4.12-5.56:1	824-1112 m	50%		Powered
LNS-T31A	2.31-4.19:1	462-838 m	50%		Powered
LNS-W31A	1.26-1.81:1	252-362 m	50%		Powered
LNS-W32	0.81:1	162 m	0.0% Fix		No Zoom
Status	2003 Discontinued (EOL) // Last update of the data: 2026-06-09				

Data



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplcp50-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.