

Sanyo PLC XP56E/L

SANYO PLC XP56E/L



The PLC XP56E/L LCD has 5000 Ansi-Lumen, a contrast of 1100:1 and an XGA 1024 x 768 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. 5000 Ansi lumens ensure that a picture width of 616 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 411 cm. The projector was launched in 2004 and is no longer sold by the manufacturer.



3 x 1,3" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

5000 / 4000 im Eco Mode

1100:1 full on/off

4,5455 min. Lumen

Vert.: +50% -0% motorisch

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

300W NSH Lamp

Articel Nr.: 610 314 9127

1500 h.

-

Powered

Powered 1,3

f=48,2-62,6 mm / EL optional

1,8-2,3:1

2 x 2W Stereo


DVI-D
D-sub 15pin in oder out
5 x BNC RGBHV in
YUV in
Cinch Video in
Cinch Stereo in
S-Video in

Screen

1667 Lux (bei 200 cm Screen)

1100:1 full on/off

1,52 min. Lumen

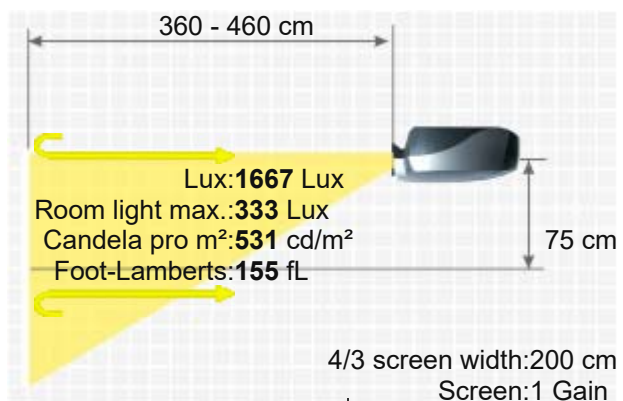

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Mini Jack
USB Typ B
RS232C
Kabelfernbedienung
Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
450W / standby 15W
319 x 168 x 429,5 mm (12,6"x6,6"x16,9") 22,99 L/dm³
39 / 35 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

9,20 kg / 20,28 lbs.
Vert.: +/-40°
Hori.: +/-10°
90%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 160 MHz
155 fL / max. 616 cm screen width
531 cd/m²


Features

- Lens shift Funktion motorisch
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with laser pointer und mouse control
- Optional Wi-Fi network compatible.
- Optional LAN network compatible.
- Auto Picture Control
- Digital Zoom
- Color Management System
- De-interlacer with 3:2 pulldown
- RJ45 optional via Net Work Manager model POA-PN01

Optional

- Bulb only NLMP3431
- Lamp ruby Ruby-LMP3431
- Lamp original 610-314-9127 / LMP81 / ET-SLMP81
- Compatible lamp LMP-K1352
- Universal Remote original Fernb-uni-V3
- Object lens original ET-SW31A / LNS-W31A
- Object lens original ET-ST32 / LNS-T32
- Object lens original ET-ST31A / LNS-T31A
- Remote control original 945 060 2239
- Air filter (big) original POA-FIL-130-g / 910 303 8774
- Air filter (small) original POA-FIL-130-k / 910 303 8781

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3433>

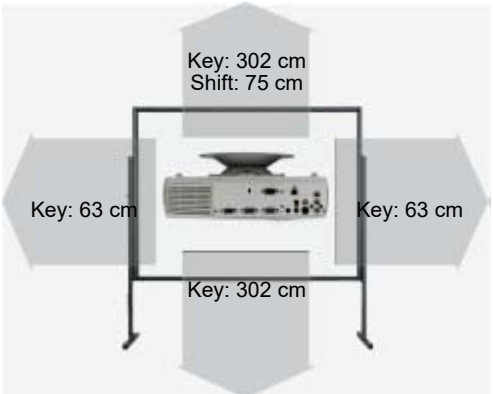

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Sanyo LNS-W31A	1.26-1.81:1	2.5-3.6 m	50%		Powered
Sanyo LNS-T32	4.12-5.56:1	8.2-11.1 m	50%		Powered
Sanyo LNS-T31A	2.31-4.19:1	4.6-8.4 m	50%		Powered
Fix Optional Lenses					
Sanyo LNS-W32	0.81:1	1.6 m	0.0% Fix		No Zoom

Status 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/sanyoplcp56el-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.