

Sanyo PLC XT30/L

SANYO PLC XT30/L



Brief Introduction

Beta 2.5

With the PLC XT30/L, manufacturer Sanyo offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 1000:1. The built-in lens shift and keystone correction function provides freedom when setting up. Thanks to the brightness of 5000 Ansi lumens, a picture width of 616 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 411 cm). This model is no longer offered by Sanyo.



3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom


Objective

Throw Ratio


Audio

Connections

5000
1000:1 full on/off
5,0000 min. Lumen
Vert.: +50% -0% Hori.: +/-15% motorisiert
XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Wide screen width or rooms with plenty of light (over 200 lumens).
330W NSH Lamp
Articel Nr.: LMP-116
2500 h. 3000 h. in Eco Mode
-

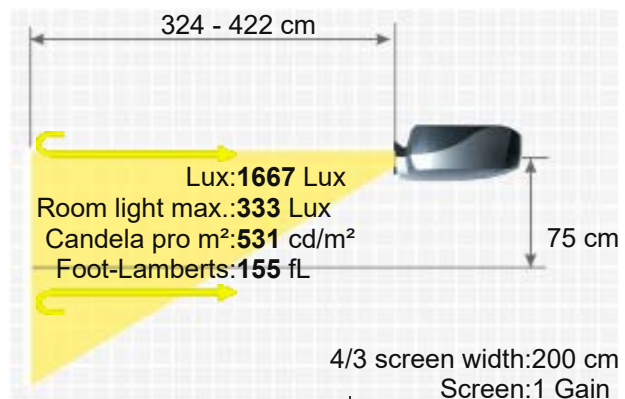

Manual
Manual 1,3
F=1,9-2,1 f=33-43 mm / L optional
1,62-2,11:1
1W Stereo
DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C Din 8pin in
USB Typ B

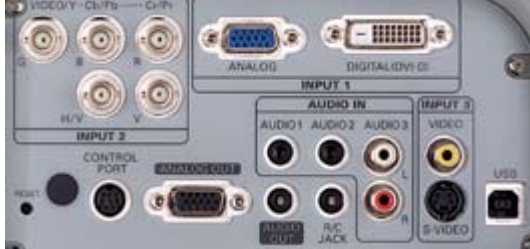

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
455 / 400W in Eco Mode
348 x 156,5 x 444 mm (13,7"x6,2"x17,5") 24,1 L/dm³
33 / 30 dB in Eco Mode

Weight
Keystone
Illumination

10,00 kg / 22,05 lbs.
Vert. +40°-20°
90%

Frequenz

H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 100 MHz

Foot-Lamberts

155 fL / max. 616 cm screen width
531 cd/m²


Features

- Lens shift Funktion motorisiert
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer
- Optional LAN network compatible.
- Digital Zoom.
- Automatic air pollution display.
- Vertical operation possible (up to 90°).
- De-interlacer with 3:2 2:2 pull down.

Optional

Bulb only	NLMP18140
Lamp ruby	Ruby-LMP18140
Lamp original	610-335-8093 / LMP116 / ET-SLMP116
Compatible lamp	LMP-K18058
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n9000256>

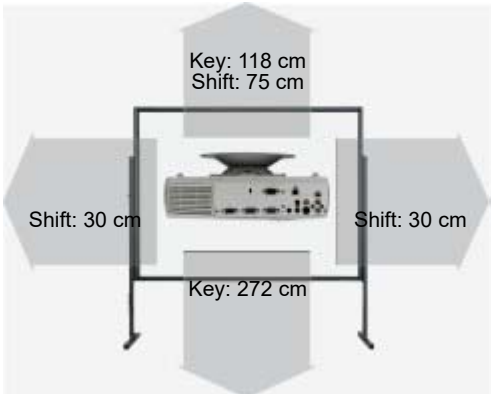

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W10	1.24-1.63:1	2.5-3.3 m	50%	+/-15%	Powered
LNS-T11	3.43-5.43:1	6.9-10.9 m	50%	+/-15%	Powered
LNS-T10	2.13-3.46:1	4.3-6.9 m	50%		Powered
Fix Optional Lenses					
LNS-W11	0.82:1	1.6 m	0.0% Fix		No Zoom

Status 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



Hcinema

<https://www.projector-database.com/pro/sanyoplctx30-en.html>

