
Sharp XG 3790E/U

Brief Introduction Beta 2.5	The Sharp model XG 3790E/U is an LCD projector with SVGA 800 x 600 resolution and a contrast of 100:1. An image width of up to 138 cm is possible, as the projector has 250 Ansi lumens. However, if room light is available, the picture should be max. 92 cm wide. It is no longer offered by the manufacturer Sharp. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.
Display Type	1 x 6,4" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector Ansi-Lumen	250
Contrast	100:1 full on/off
Black Level	2,5000 min. Lumen
Offset	-
Screen Ansi-Lumen	81 Lux (bei 203 cm Screen)
Contrast	100:1 full on/off
Black Level	0.835 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	NTSC, PAL, SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Very narrow picture width and rooms with very little light.
Light Source	350W Metalldampf Lamp Articel Nr.: CLMPF0037DE01 BQC-XG3700E/1
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	F=4,4 f=218mm
Throw Ratio	1,68:1
Audio	5W
Connections	S-Video: (1) Mini DIN 4-pin Video: (1) RCA jack
Ceiling Mounting	-
Power	440W
Size WxHxD	351 x 222 x 499 mm (13,8"x8,7"x19,6") 38,88 L/dm³
Operating Noise	-

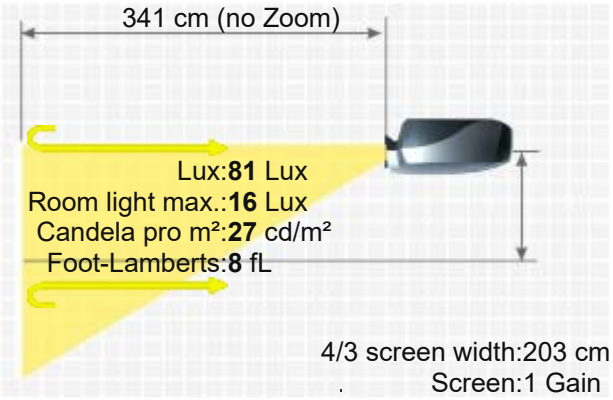

Weight	10,60 kg / 23,37 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	8 fL / max. 138 cm screen width 27 cd/m²
Features	-
Optional	Bulb only original — CLMPF0037DE01 Lamp original — BQC-XG3790E/1 Order here: https://www.hcinema.de/lampen/shop-en.php?id=3615
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

SHARP XG 3790E/U

More Details

HCinema

https://www.projector-database.com/pro/sharpxg3790e-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.