

SIM2 SVD 500 Plus



SIM2 SVD 500 PLUS

Display Type



3 x 7 Zoll Röhren
SVGA 4/3

Ansi-Lumen
Contrast
Black Level
Offset

Projector
826 950 Lumen
-
-
-

Screen
267 Lux (bei 203 cm Screen)
-
-

Resolution

SVGA 800 x 600
480.000 Pixel
XGA 1024 x 768 compressed

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV

Application

CRT Projection | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

CRT Röhre

Light Life

ca. 10000 - 20000 h. (je nach Anwendung)

Operating Costs

-

Focus

Powered

Zoom

No Zoom

Objective


HD 145

Throw Ratio

-

Audio

-

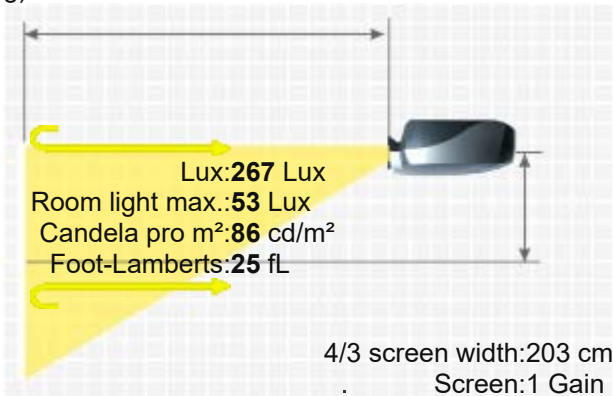

Connections

5 mal BNC Eingang
YUV per BNC Buchsen Eingang
Scart Eingang
D-sub 15pin in
Cinch Video in per einer BNC Buchse
S Video Eingang und Ausgang
RS232 Serial Port



Ceiling Mounting

Yes

Power

220W

Size WxHxD

620 x 290 x 700 mm (24,4"x11,4"x27,6") 125,86 L/dm³

Operating Noise

-

Weight

35,00 kg / 77,16 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-16 kHz
V-sync: 32-38 Hz
Range max.: 20 MHz

Foot-Lamberts

25 fL / max. 250 cm screen width
86 cd/m²

Features

■ Freeze
■ Gamma correction

In Test
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/sim2SVD500plus-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.