

SIM2 CINEMA 100



Brief Introduction

Beta 2.5

The SIM2 CINEMA 100 3D DLP projector has 10000 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 10000 Ansi lumens, a picture width of 1016 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 677 cm). It is also Full HD 1080P and 3D compatible. This model is no longer offered by SIM2.

Display Type

3 x 0,95" DC4 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

10000

4444 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

1,0000 min. Lumen

0,445 min. Lumen

Lens shift

Vert.: +60% -10% Hori.: +/-10%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

WUXGA 1920 x 1200 compressed

3D Compatibility

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Very large screen width and rooms with plenty of light and shaded daylight.

Light Life

2 x 400W UHP Lamp

1500 h. 2000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

2 x HDMI 1.4 in

DVI in

HD-SDI in

YUV in

Cinch Video in

USB Tyb B in

RJ45 in

3D Sync Out

3 x 12V Trigger out

Wired Remote Mini Jack

Ceiling Mounting

-

Power

980W

Size WxHxD

543 x 200 x 520 mm (21,4"x7,9"x20,5") 56,47 L/dm³

Operating Noise

-

Weight

30,00 kg / 66,14 lbs.

Keystone

Vert.: +/-30°

Hori.: +/-30°

Illumination

-

Frequenz



H-sync: 15-80 kHz

V-sync: 48-114 Hz

Foot-Lamberts

413 fL / max. 1016 cm screen width

1415 cd/m²

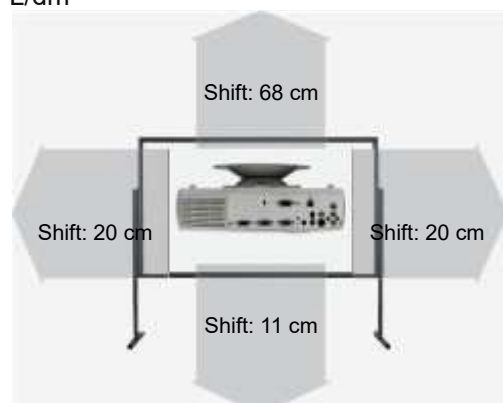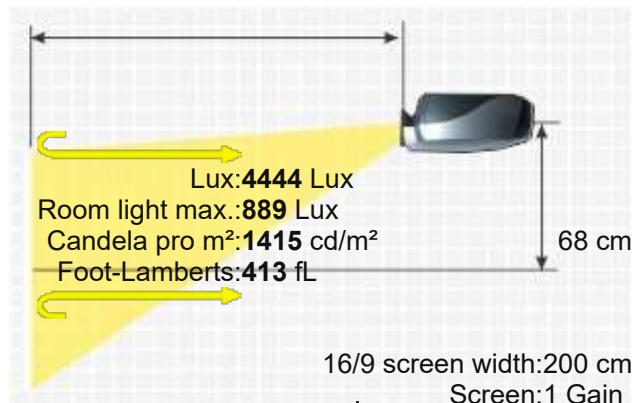

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Lan network compatible.

Features

Screen Mirroring

-

Name	Ratio	Optional Lenses			
		Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
T3	2.54-3.9:1	5.1-7.8 m	60-10%	+/-10%	
T2	1.75-2.48:1	3.5-5 m	60-10%	+/-10%	Powered
T1	1.37-1.66:1	2.7-3.3 m	60-10%	+/-10%	Powered
Status Data	2012 Discontinued (EOL) // Last update of the data: 2025-03-03				

More Details



HCinema

<https://www.projector-database.com/pro/sim2cinema100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.