


SIM2 Lumis 20th

SIM2 LUMIS 20TH



Brief Introduction

Beta 2.5

A brief introduction to the SIM2 Lumis 20th. The DLP projector has an HDTV 1920 x 1080 resolution and a contrast of 10000:1. The built-in lens shift and keystone correction function provides freedom when setting up. 556 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 371 cm. Playing 1080P and 3D is also no problem for the projector. The model was built by SIM2 in 2014 and is no longer current, but is still very popular in our projector database.



3 x 0,95" DC4 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

3000

1333 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,3000 min. Lumen

0,133 min. Lumen

Lens shift

Vert.: +50% -10%

Resolution

HDTV 1920 x 1080
2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

High-End Homecinema | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

280 / 230W im Eco Mode Lamp

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

2 x HDMI in
D-sub 15pin in
YUV in
Cinch Video in
S-Video in
USB in
RS232C Din 9 pin in

Ceiling Mounting

Yes

Power

-

Size WxHxD

-

Operating Noise

-

Weight


11,00 kg / 24,25 lbs.

Keystone

Vert.: +/-18°

Illumination

-

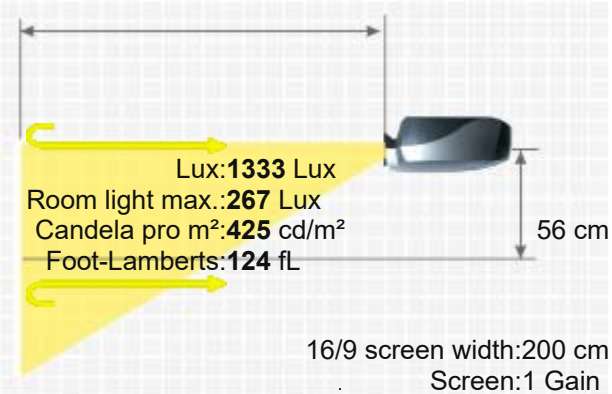

Frequenz
H-sync: 15-80 kHz
V-sync: 24-120 Hz

Foot-Lamberts
124 fL / max. 556 cm screen width

425 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
T3	2.6-3.9:1	5.2-7.8 m	50-10%		Powered
T2	1.82-2.48:1	3.6-5 m	50-10%		Powered
T1	1.37-1.66:1	2.7-3.3 m	50-10%		Powered

Status
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2014-09-22 16:12:24

Data

More Details



HCinema

<https://www.projector-database.com/pro/sim2lumis20th-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.