

SIM2 Data Graphics (SDG) 900 Plus



8" EMF CRT Röhre
4/3 Elektromagnetisch Fokussierte Röhre

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

1043 1200 peak white lumens

337 Lux (bei 203 cm Screen)

Projector

Screen

-

-

-

-

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV

CRT Projection | Small screen width, rooms with very little ambient light below 100 lumens.

CRT Röhre

-

Powered

No Zoom

HD 145

-

-


5 mal BNC Eingang

Yes

500W

620 x 305 x 820 mm (24,4"x12"x32,3") 155,06 L/dm³

-

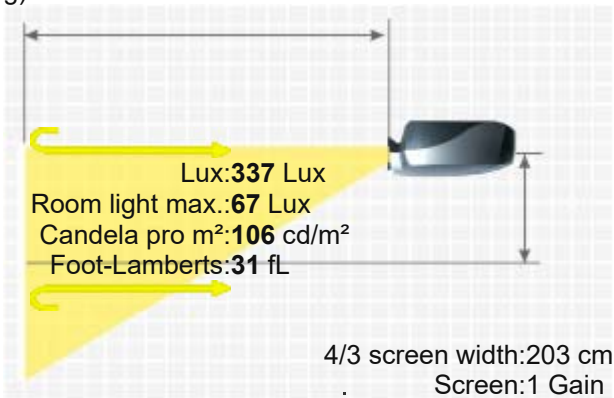

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

55,00 kg / 121,25 lbs.

-

-

H-sync: 15-105 kHz

V-sync: 38-150 Hz

Range max.: 75 MHz

31 fL / max. 281 cm screen width

106 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/sim2sdg900plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

P L U S