

Sony VPL SX226

SONY VPL SX226



The short-throw Sony VPL SX226 LCD projector has 2800 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. The lamp life is specified by the manufacturer as 4000 hours, which converts to over 5.5 years at 2 hours per day. Thanks to the short-throw projection ratio of just 0.46:1, the projector does not stand still in the room. For a 2m wide image, the projector only needs to be 92 cm away from the screen. Even 1080P video signals are no problem for the projector. The model was built by Sony in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2800 / 1600 im Eco Mode 933 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off 3000:1 full on/off

Black Level

0,9333 min. Lumen 0,311 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

210W UHP Lamp

Articel Nr.: LMP-E212

Light Life

4000 h. 6000 h. in eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio


0,46:1


Audio

1 x 16W

Connections

HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ B in
RS232C Din 9 pin in
RJ45 in

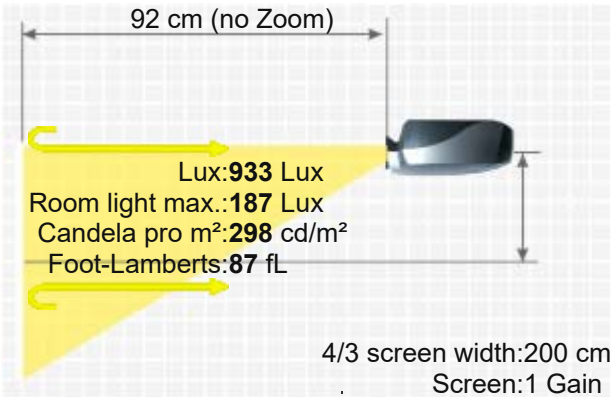

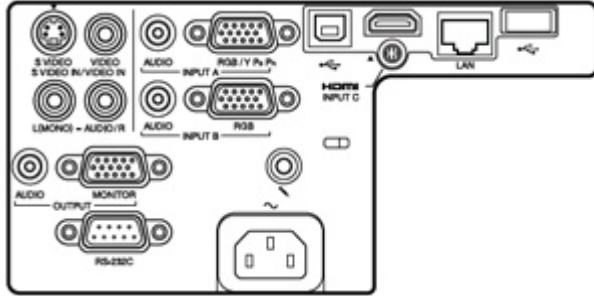

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

Frequenz

Foot-Lamberts

Features

Optional

Status



HCinema

<https://www.projector-database.com/pro/sonyvplsx226-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

