

SVIC X500i



SVIC X500i



Brief Introduction

Beta 2.5

The standard portable X500i DLP projector from SVIC has 4000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 4000 Ansi lumens, an image width of 551 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 367 cm). On the market since 2008, the model is no longer offered by the manufacturer SVIC.



1 x 0,55" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Projector 4000

Screen 1333 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

Screen 2000:1 full on/off

Black Level

2,0000 min. Lumen

Screen 0,668 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

180W P-VIP Lamp

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

-

Connections

2 x DSub 15 pin in 1 x out

S-Video in

Cinch video in

USB in

RS232C

Ceiling Mounting

-

Power

230W

Size WxHxD

271 x 90 x 223 mm (10,7"x3,5"x8,8") 5,44 L/dm³

Operating Noise

32 / 30 dB in Eco Mode

Weight

2,70 kg / 5,95 lbs.

Keystone

-

Illumination

-

Frequenz


H-sync: 15-100 kHz

V-sync: 43-120 Hz

Foot-Lamberts

124 fL / max. 551 cm screen width

425 cd/m²

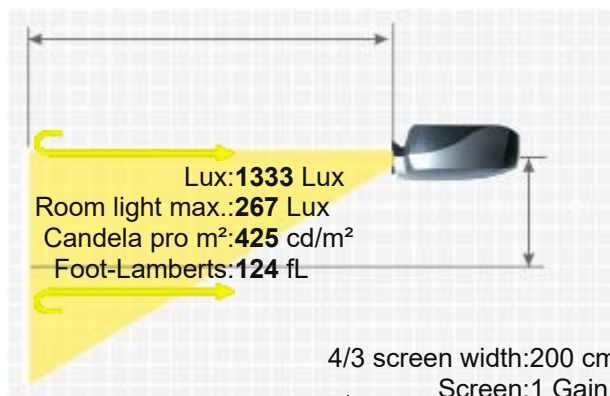

Features

Status

Data

■ Eco Mode

■ 5-segment colour wheel.

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/svicx500i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.