

t1p t1p
791 790

performance

t1p 790

t1p 791 with projection camera

3,000 ANSI-lumens

LCD Technology (MLA)



For a better performance.

TOSHIBA



t1p 790/791

Bright High-End projector

t1p 790/791

Micro lens array technology ensures an optimal light arrangement

t1p 790/791

Perfect for great audience presentations


t1p 790/791

Vertical and horizontal keystone correction

t1p 791

Integrated projection camera

Projection distance (in meters)

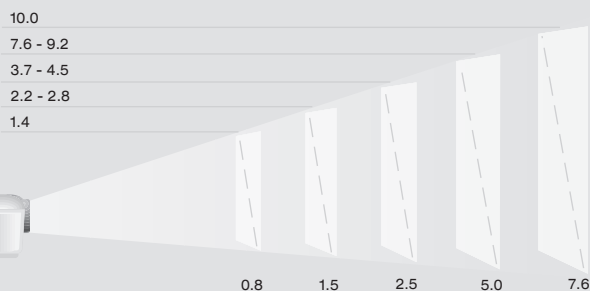

Picture size (diagonal in meters)

Display	3 x 0.99" polysilicon TFT (MLA)
Resolution	XGA 1,024 x 768 (SXGA/UXGA comp.)
Brightness	3,000 ANSI-lumens
Colour reproduction	16.7 mio. colours simultaneous
Contrast	400:1
Picture format	4:3, switch to 16:9
Lamp	250 W lamp
Frequency (horiz./vertical)	31.5 - 80 kHz / 50 - 85 Hz
Lens	F = 1.7 - 2.1 / f = 33.6 - 42 mm 1.25 x manual zoom and focus
Digital keystone correction	vertical / horizontal +/- 15°
Picture size (diagonal)	0.8 - 7.6 m
Projecting distance	1.4 - 10.0 m
Input signal	NTSC/PAL/SECAM, HDTV & DTV, VGA/SVGA/XGA/SXGA & UXGA (compr.)
Inputs	RGB, DVI, Colour difference (D-sub 15), video (RCA, S-video), audio (2xRCA, stereo mini Jack)
Outputs	Monitor (RGB)
Serial interface	RS-232C, USB
Wireless communication	-
Power supply	AC 100-240V, 50/60 Hz
Loudspeaker	yes
Dimensions (W x H x D)	338 x 95,5 x 265 mm (t1p 790) 338 x 95,5 x 328 mm (t1p 791)
Weight	4.2 kg (t1p 790) / 5.0 kg (t1p 791)
Extras	picture-in-picture-function
Accessories	remote control with laserpointer, DVI-, RGB-, PC-, AV-, USB- and powercable, Mac-adaptor, batteries, instructions incl. CD-ROM, softcase
Options	trolley, ceiling-mounting
Projection camera (t1p 791)	1/3" CCD, 1,450,000 pixels, 550 TV-lines F = 3,1 / f = 6,4 mm, manual focus, overlay function

TOSHIBA

Toshiba Europe GmbH · Professional Visual Products

Phon: ++49-2131-158-01 Fax: ++49-2131-158-835

e-mail: projektoreninfo@toshiba-teg.com