

Toshiba TLP B2

TOSHIBA TLP B2



Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

The standard portable TLP B2 LCD projector from Toshiba has 1000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 1000 Ansi lumens, a picture width of 275 cm is possible. In room light, the picture should be max. 183 cm wide. The model is no longer offered by Toshiba.

3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

1000
400:1 full on/off
2,5000 min. Lumen
333 Lux (bei 200 cm Screen)
400:1 full on/off
0.839 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Articel Nr.: TLPLB2

2000 h.

14,29% / 0,06 €

Manual

Manual 1,22

-

-

1W

Cinch Video in

D-sub 15pin in

S Video Eingang

RS232C Controuler

Audio Sereo Mini Jack

Yes

160W

232 x 71 x 272 mm (9,1"x2,8"x10,7") 4,48 L/dm³

37dB


2,60 kg / 5,73 lbs.

-

-

H-sync: 25-80 kHz

V-sync: 50-85 Hz

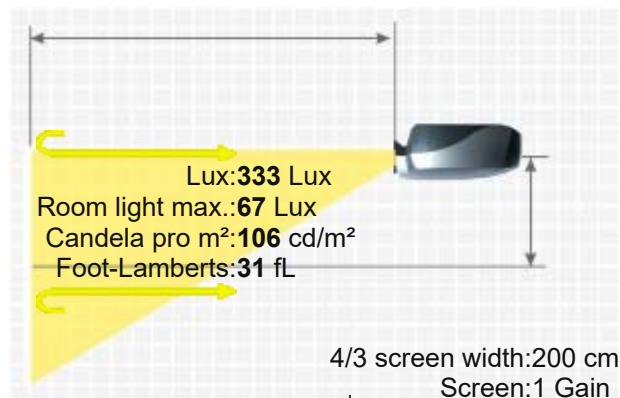

Foot-Lamberts	31 fL / max. 275 cm screen width	
	106 cd/m²	
Features	■	
In Test	-	
Please note	keine 16/9 Umschaltung	
	Bulb only	NLMP4138
	Lamp ruby	Ruby-LMP4138
Optional	Lamp original	TLPLB2
	Compatible lamp	LMP-K4138
	Universal Remote original	Fernb-uni-V3
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n4138	
Data	- Discontinued (EOL) // Last update of the data: 2023-08-04	

More Details



HCinema

<https://www.projector-database.com/pro/toshibatlpb2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.