X4100

performance-presentation

x4100

4,100 ANSI-lumens

275 W lamp

# A shining example!

TOSHIBA

# X4100

## Brilliant values

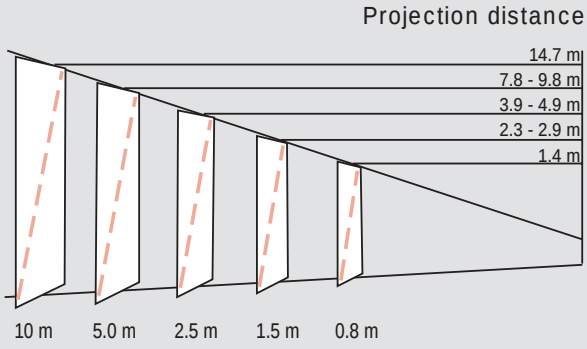


| | |
|---|---|
| **Display** | 1,3” p-Si TFT LDC with MLA |
| **Resolution** | XGA 1,024 x 768 |
| **Brightness** | 4,100 ANSI-lumens |
| **Color reproduktion** | 16.7 mio. colours |
| **Contrast** | 800:1 |
| **Lamp** | 275 W lamp (220 W in ECO-mode) |
| **Frequency (horiz./vertical)** | 15 - 100 kHz / 50 - 100 Hz |
| **Lens** | F= 1.7 - 2.0 / f= 48.2 - 62.6 mm,<br>1.3 motor zoom |
| **Digital keystone correction** | vertical 80 degrees, horicontal 20 degrees |
| **Picture size (diagonal)** | 0.8 - 10.0 m |
| **Projecting distance** | 1.4 - 14.7 m |
| **Input signal** | NTSC/PAL/SECAM, NTSC4.43, PAL-M/N<br>VGA/SVGA/XGA/SXGA (comp.), HDTV(YUV), DTV |
| **Inputs** | Video (RCA pin x 1 / S-video x 1),<br>RGB (analog: D-sub 15 pin x 1 / BNC),<br>RGB (digital: DVI), audio (RCA pin x 2, L/R stereo mini jack), colour difference (RCA pin x 3 / BNC) USB |
| **Outputs** | RGB (D-sub 15 x 1) |
| **Serial interface** | RS-232C |
| **Wireless communication** | - |
| **Power supply** | AC 100-240V, 50/60 Hz |
| **Loudspeaker** | 2 W + 2 W Stereo |
| **Dimensions (W x H x D)** | 319 x 168 x 470 mm |
| **Weight** | 8.4 kg |
| **Extras** | ECO-mode, lens shift, freeze-function |
| **Accessories** | Remote control, batteries, owner’s manual,<br>power cord, RGB-, adapter (MAC)-,<br>Mouse Control- and remote control cable |
| **Options** | optional lens, ceiling-mounting |

Subject to modifications and errors

TOSHIBA

Toshiba Europe GmbH · Professional Visual Products
Tel: 0 18 05/22 92 32 (0,12€/Min.) Fax: 0 18 05/22 82 12 (0,12€/Min.)
e-mail: projektoreninfo@toshiba-teg.com