

Vinew VP-LX2



Brief Introduction

Beta 2.5

A brief introduction to the Vinew VP-LX2. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 700:1. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours a day. The projector can illuminate an image width of up to 515 cm thanks to its 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 343 cm is recommended. The projector is very quiet compared to others with an operating noise of 30 decibels. The model is no longer offered by Vinew.



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

3500

700:1 full on/off

5,0000 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

180W EHPL Lamp

4000 h.

-

Manual

Manual

-

-

1 x 2W

D-sub 15 pin in

S-Video in

Cinch Video in

RS232C

Yes

250W

310 x 96 x 270 mm (12,2"x3,8"x10,6") 8,04 L/dm³

30dB

2,70 kg / 5,95 lbs.

Vert.: +/-30°

95%

-


108 fL / max. 515 cm screen width

370 cd/m²

1167 Lux (bei 200 cm Screen)

700:1 full on/off

1,674 min. Lumen

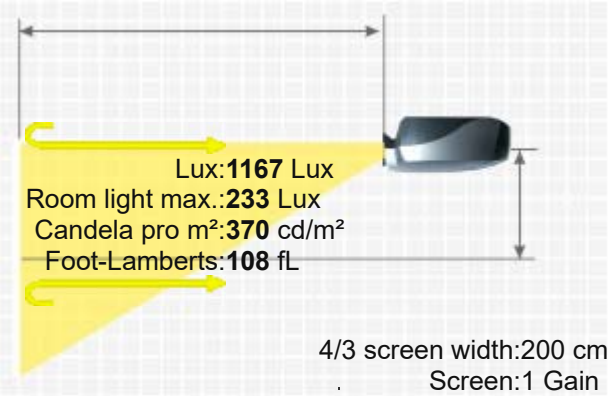

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/vinewvplx2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.