

Vision VS2

VISION VS2



Brief Introduction

Beta 2.5

The Vision VS2 LCD projector has 1500 Ansi lumens, a contrast of 500:1 and an SVGA 800 x 600 resolution. An image width of up to 337 cm is possible. However, the image should be smaller in room lighting. We recommend max. 225 cm. The projector was launched in 2004 and is no longer sold by the manufacturer.

Display Type



3 x 0,7" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

1500

500 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

3,0000 min. Lumen

1,006 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC,

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

180W UHE Lamp

Light Life

Articel Nr.: VS2

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

f=21,5-28 mm

Throw Ratio

1,45-1,93:1

Audio

2 x 1W

Connections

D-sub 15pin in und out

YUV in

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack

Ceiling Mounting

Yes

Power


240W

Size WxHxD

240 x 80 x 280 mm (9,4"x3,1"x11") 5,38 L/dm³

Operating Noise

35dB

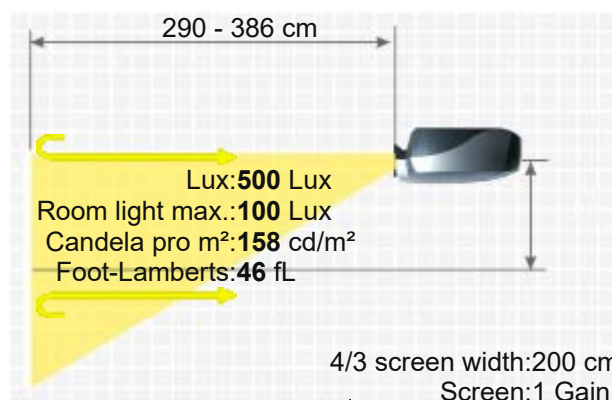

Key: 78 cm

Weight 2,80 kg / 6,17 lbs.
Keystone Vert.: +/-15° automatisch
Illumination 85%
H-sync: 15-91 kHz
Frequenz V-sync: 50-85 Hz
Range max.: 157 MHz
Foot-Lamberts 46 fL / max. 337 cm screen width
158 cd/m²

- Features
- Freeze
 - Automatic and manual vertical keystone correction
 - Picture-in-Picture
 -

Status 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/visionvs2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.