

Vivibright HD320



VIVIBRIGHT HD320



Brief Introduction

Beta 2.5

Display Type

1 x LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Ansi-Lumen

250 83 Lux (bei 200 cm Screen)

Contrast

600:1 full on/off 600:1 full on/off

Black Level

0,4167 min. Lumen 0,139 min. Lumen

Offset

-

Resolution

VGA 640 x 480

307.200 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Game-Portabel | Very portable, small-screen projections.

Very narrow picture width and rooms with very little light.

Light Source

RGB LED

Light Life

20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

-

Connections

HDMI in

D-sub 15 pin in

S-Video in

Cinch Video in

Cinch Stereo in

Ceiling Mounting

-

Power

90W

Size WxHxD

230 x 80 x 180 mm (9,1"x3,1"x7,1") 3,31 L/dm³

Operating Noise

35dB

Weight

1,20 kg / 2,65 lbs.

Keystone

Vert.: +/-15°

Illumination

85%

Frequenz

H-sync: 15-150 kHz

V-sync: 48-190 Hz

Foot-Lamberts

8 fL / max. 138 cm screen width

27 cd/m²


Features

-

Status

2011 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

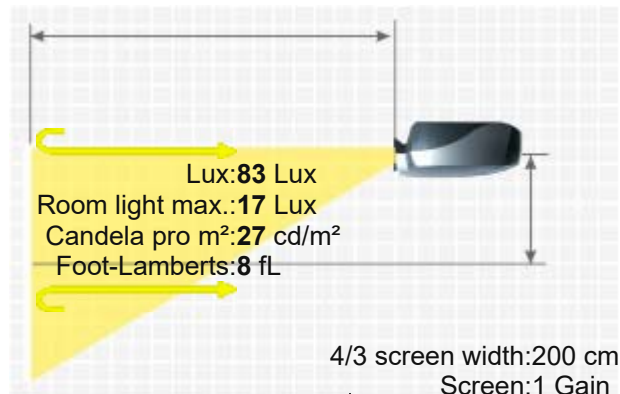



HCinema

<https://www.projector-database.com/pro/vivibrighthd320-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.