

Vivitek D420 VS



VIVITEK D420 VS



Brief Introduction

Beta 2.5

A brief introduction to the D420 VS: The Vivitek DLP projector offers 1650 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. An image width of up to 354 cm is possible. However, the image should be smaller in room light. We recommend max. 236 cm. On the market since 2005, the model is no longer offered by the manufacturer Vivitek.



1 x 0,55 12 Grad DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1650

550 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

0,8250 min. Lumen

0,275 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W VIP Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,18

Objective

-

Throw Ratio

1,7-2,0:1

Audio

1 x 1W

Connections

D-sub 15pin in und out

Cinch Video in

S-Video in

USB

Ceiling Mounting

Yes

Power

-

Size WxHxD

265 x 97 x 202 mm (10,4"x3,8"x8") 5,19 L/dm³

Operating Noise

-

Weight

2,40 kg / 5,29 lbs.

Keystone

Vert.: +/-15°

Illumination



90%

Frequenz

H-sync: 31-97 kHz

Foot-Lamberts

51 fL / max. 354 cm screen width
175 cd/m²

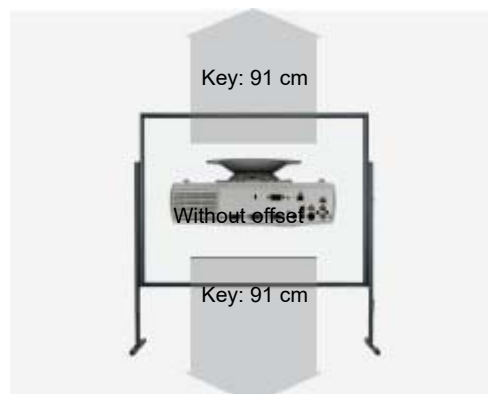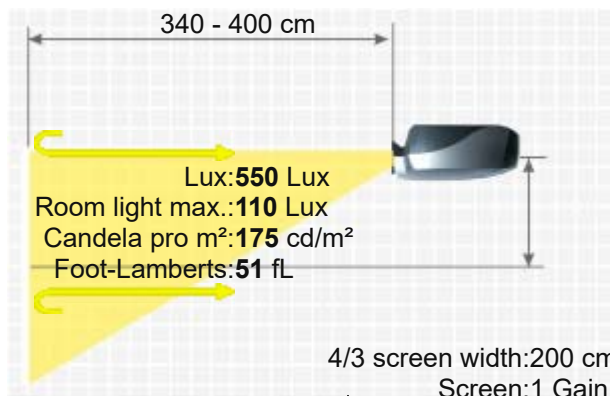

- Eco Mode
 - Kensington Slot
 - De-interlacer with 2:2 3:2 pull down
- 2005 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/vivitek420vs-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.