

Vivitek D4500V



VIVITEK D4500V



A brief introduction to the Vivitek D4500V. The stationary DLP projector has an XGA 1024 x 768 resolution and a contrast of 2200:1. Includes a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 4500 Ansi lumens, a picture width of 584 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 389 cm). Furthermore, the projector can play 1080P without any problems. The model built in 2013 is no longer offered by Vivitek.

Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DDP2431 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4500 Screen 1500 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off 2200:1 full on/off

Black Level

2,0455 min. Lumen 0,683 min. Lumen

Lens shift

Vert.: +50% -10% Hori.: +/-10%

Resolution

XGA 1024 x 768

Video Modes

786.432 Pixel

3D Compatibility

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

330W UHP Lamp

1500 h. 2000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,25

Objective

F=2,46-2,56 f=22,82-28,49 mm

Throw Ratio

1,6-2,0:1

Audio

2 x 3W

Connections

HDMI 1.3 in

DVI-D in

2 x D-sub 15 pin in und out

5 x BNC RGBHV in

S-video in

Cinch Video in

Audio Mini Jack in und out

RJ 45 in

USB

12V Trigger out

Ceiling Mounting

Yes

Power


390 / 335W in Eco Mode

Size WxHxD

431,11 x 161,51 x 344,16 mm (17"x6,4"x13,5") 23,87 L/dm³

Operating Noise

37 / 33 dB in Eco Mode

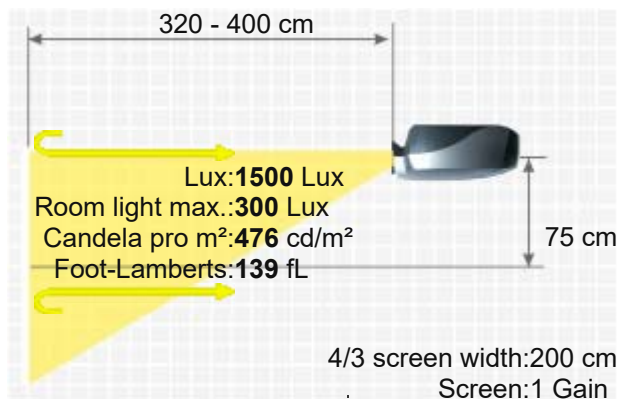

Weight

8,60 kg / 18,96 lbs.

Keystone

Vert.: +/-30°

Illumination

85%

Frequenz

H-sync: 15-90 kHz
V-sync: 50-85 Hz

Foot-Lamberts

139 fL / max. 584 cm screen width
476 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- BrilliantColor™
- Lan network compatible.
- Overscan adjustable
- Digital Zoom
- 3D-ready

Optional

Object lens original

5811119236-SVV / VL901G

Object lens original

5811116224-SU / VL905G

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1719>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
VL905G	2-3:1	4-6 m	50-10%	+/-10%	Powered
VL901G	1.58-1.97:1	3.2-3.9 m	50-10%	+/-10%	Powered
Fix Optional Lenses					
VL903G	0.8:1	1.6 m	0.0% Fix		No Zoom

Status

2013 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details



HCinema

<https://www.projector-database.com/pro/vivitek4500v-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.