

# Vivitek D630MX



VIVITEK D630MX



## Brief Introduction

Beta 2.5

The Vivitek D630MX DLP projector has 3200 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. An image width of up to 493 cm is possible. However, the image should be smaller in room light. We recommend max. 329 cm. The model was built by Vivitek in 2005 and is no longer current.



1 x 0,7" 12 Grad DDR DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

## Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Projector

3200

1000:1 full on/off

3,2000 min. Lumen

-

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product

presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

-

-

-

Manual

Manual 1,21

-

-

-

1,73-2,10:1

-

-

-

DVI

Cinch Video in

S-Video in

Mini Jack

RS232C

RJ45

Yes

-

285 x 86 x 220 mm (11,2"x3,4"x8,7") 5,39 L/dm<sup>3</sup>

35dB

-

-

-

-

-

-

-

-

-

-

-

-

3,10 kg / 6,83 lbs.

Vert.: +/-15°

80%

-

-

-

-

-

-

H-sync: 13-100 kHz

99 fL / max. 493 cm screen width



339 cd/m<sup>2</sup>

339 cd/m<sup>2</sup>

339 cd/m<sup>2</sup>

339 cd/m<sup>2</sup>

339 cd/m<sup>2</sup>

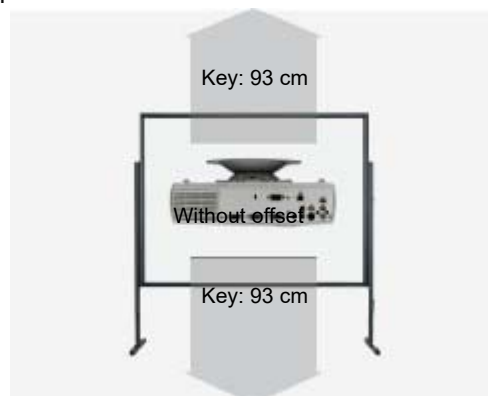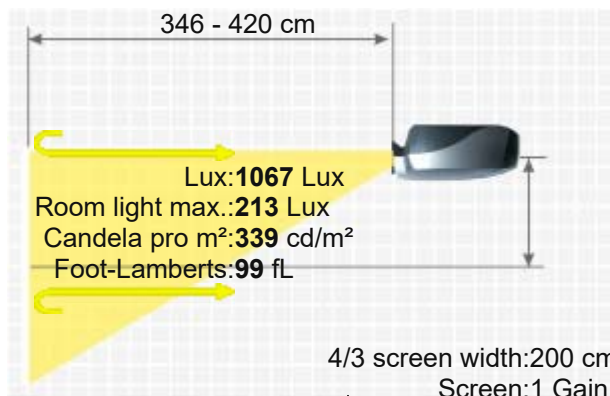

Features

- Kensington Slot
- Lan network compatible.

Status  
Data

2005 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/vivitek630serie-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.