

Vivitek D632 MX

VIVITEK D632 MX



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD

Operating Noise

The standard portable Vivitek D632 MX DLP projector has 3200 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The projector can illuminate a screen width of 493 cm well. However, if room light is available, the image width should ideally not exceed 329 cm. The model was built by Vivitek in 2006 and is no longer current.



1 x 0,7" 12 Grad DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

3200
2000:1 full on/off
1,6000 min. Lumen

Screen

1067 Lux (bei 200 cm Screen)
2000:1 full on/off
0,534 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

200W VIP Lamp

-

-

Manual

Manual 1,22

F=2,44-2,63 f=23,97-29,24 mm

1,69-2,06:1

-


DVI-I in
D-sub 15pin in
S-Video in
Cinch Video in
RJ45
RS232C

-

-


328 x 88 x 238 mm (12,9"x3,5"x9,4") 6,87 L/dm³

-

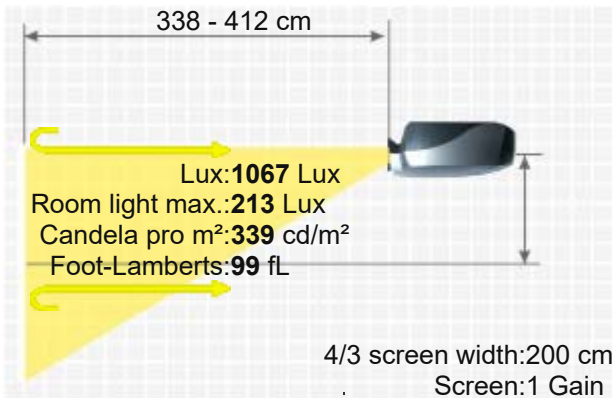

Key: 91 cm

Weight	2,90 kg / 6,39 lbs.
Keystone	Vert.: +/-15°
Illumination	90%
Frequenz	H-sync: 15-90 kHz V-sync: 50-85 Hz
Foot-Lamberts	99 fL / max. 493 cm screen width 339 cd/m²
Features	■ Kensington Slot ■ Lan network compatible.
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04

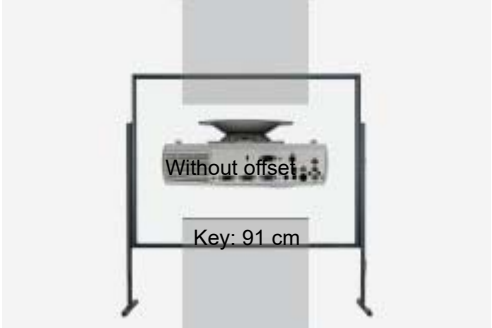

Data



More Details



HCinema

<https://www.projector-database.com/pro/vivitek632mx-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.