


Vivitek DU8055Z

VIVITEK DU8055Z



The Vivitek DU8055Z is a DLP laser projector with WUXGA 1920 x 1200 resolution and a contrast of 3000000:1. It is a laser projector with a 20000-hour light lifespan, which is over 13.7 years at four hours of use per day. The projector can be set up very freely thanks to the horizontal and vertical keystone correction. The projector will be able to illuminate a picture width of 1285 cm well. The projector can create rooms with low light with a smaller picture width, max. 857 cm is what we would recommend here. If the image is still too small, the projector offers integrated edge blending software that allows multiple projectors to project a large image together. Furthermore, it is Full HD 1080P and 4K (compressed) compatible. Even projection onto the ceiling is possible thanks to 360° projection.

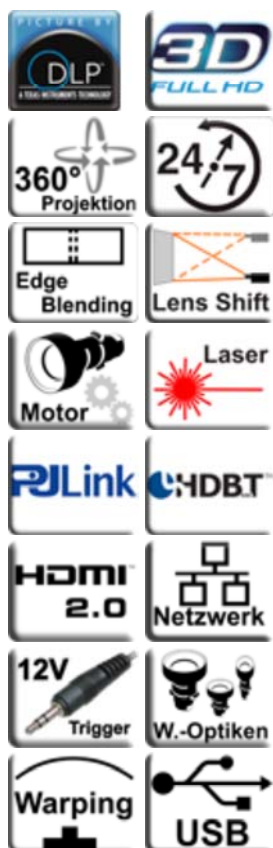

1 x 0,8" DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Projector 16000

3000000:1 full on/off

0,0053 min. Lumen

Vert.: +/-60% Hori.: +/-20%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K+) 3840 x 2400 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Dual Laser

20000 h. / 30000 h. in Eco Mode

0,00 € Laser

Powered

Powered x1,5

optional


optional

1 x 10W

Screen 7111 Lux (bei 200 cm Screen)

3000000:1 full on/off

0,002 min. Lumen

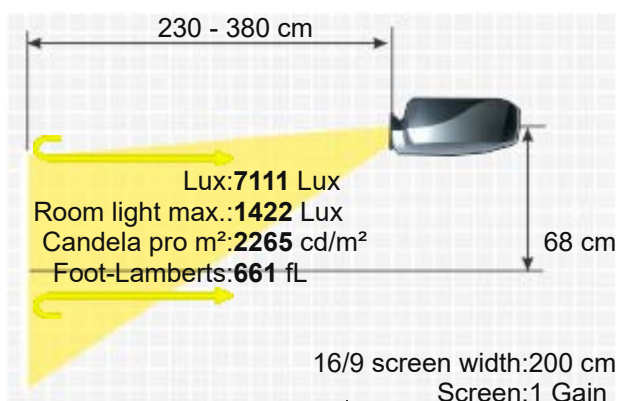

2x HDMI 2.0 in (HDCP V2.2)
2x DisplayPort 1.2
DVI-D in
3G-SDI in und out
3D Sync In und Out
USB-A (power only) in
RS232C Din 9 pin in
RJ45 in
HDBaseT
12V Trigger

Connections




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
950W Normal
500 x 216 x 591 mm (19,7"x8,5"x23,3") 63,83 L/dm³
40 / 39 dB in Eco Mode

Weight
Keystone
Illumination

29,40 kg / 63,93 lbs.
Vert.: +/-60°
Hori.: +/-20°
85%

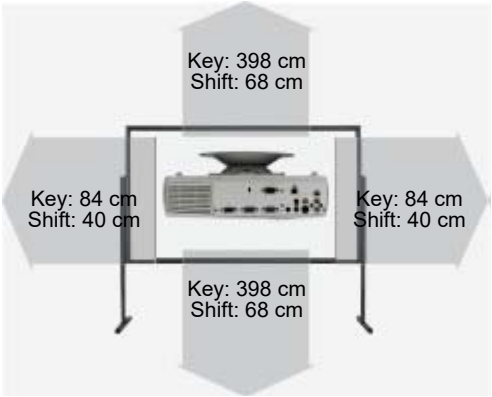

Frequenz
Foot-Lamberts

-
661 fL / max. 1285 cm screen width
2265 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- PJLink™
- Lan network compatible.
- Constant Input: Auto Switching

Optionaler Zubehör



Deckenhalterung Länge 225 mm

Halterung45

85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
D89-WZ01	1.05-1.41:1	2.1-2.8 m	+/-60%	+/-20%	Powered
D89-UWZ02	0.74-1.08:1	1.5-2.2 m	+/-60%	+/-20%	Powered
D89-UWZ01	0.55-0.75:1	1.1-1.5 m	+/-60%	+/-20%	Powered
D89-UST01	0.31-0.33:1	0.6-0.7 m	+/-60%	+/-20%	Powered
D89-STD01	1.4-2.11:1	2.8-4.2 m	+/-60%	+/-20%	Powered
D89-SMLZ01	2.1-4:1	4.2-8 m	+/-60%	+/-20%	Powered
D88-LOZ201	4.46-6.94:1	8.9-13.9 m	+/-60%	+/-20%	Powered
D88-LOZ101	3-4.52:1	6-9 m	+/-60%	+/-20%	Powered

Status
Data

2024 Current model // Last update of the data: 2025-01-27
Created: 2025-01-09 16:06:39





HCinema

<https://www.projector-database.com/pro/vivitekdu8055z-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.