

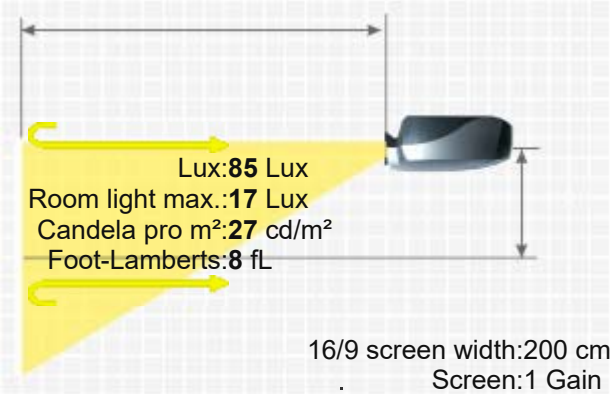


Wimius T7

WIMIUS T7



Display Type	<div>  1 x LCD Panel  WVGA 16/9 Liquid Crystal Display </div>	
Ansi-Lumen	192 / 3200 Lumen	85 Lux (bei 200 cm Screen)
Contrast	2000:1	2000:1
Black Level Offset	0,0960 min. Lumen	0,043 min. Lumen
Resolution	WVGA 854 x 540 461.160 Pixel	
Video Modes	HDTV 1920 x 1080 compressed Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p	
Application	Standard-Portabel External training and company presentations, as well as product presentations. Very narrow picture width and rooms with very little light.	
Light Source	LED	
Light Life	20000 h.	
Operating Costs	0,00 € LED	
Focus	Manual	
Zoom	No Zoom	
Objective	-	
Throw Ratio	-	
Audio	-	
Connections	HDMI in D-Sub 15 Pin in SD-Karte Composite Video Mini Jack Audio out USB in	
Ceiling Mounting	Yes	
Power	80W	
Size WxHxD	260 x 100 x 210 mm (10,2"x3,9"x8,3") 5,46 L/dm³	
Operating Noise	-	
Weight	2,00 kg / 4,41 lbs.	
Keystone	-	
Illumination	-	



Frequenz

-

Foot-Lamberts

8 fL / max. 141 cm screen width

27 cd/m²

Features

■ Full HD 1080P compatible

-

Status

2018 Current model // Last update of the data: 2024-09-18



More Details



HCinema

<https://www.projector-database.com/pro/wimiust7-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.