

Yokogawa D 3300X



YOKOGAWA D 3300X



Brief Introduction

Beta 2.5

A brief introduction to the D 3300X: The Yokogawa standard portable LCD projector offers 3000 Ansi lumens, a contrast of 260:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 477 cm with its 3000 Ansi lumens. In room light, however, the image width should ideally be less than 318 cm. The projector is no longer sold by the manufacturer.



3 x 0,99" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

3000

260:1 full on/off

11,5385 min. Lumen

Screen

1000 Lux (bei 200 cm Screen)

260:1 full on/off

3.891 min. Lumen

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

XGA 1024 x 768

786.432 Pixel

NTSC, PAL, SECAM NTSC 4,43

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

270W EHP Lamp

Articel Nr.: LMP4309

1500 h.

-

Manual

Manual 1,29

F=1,7-2,1 f=33,6-43,3 mm

1,67-2,15:1

1W Mono

Audio input Stereo mini- jack

RCA und S-VIDEO

RCA (R + L) 1

Output D-Sub15 1

Stereo mini- jack X 1 (phi 3.5mm)

RS232C (D-Sub9) 1 system

Yes

360W standby 5W

360 x 111 x 279 mm (14,2"x4,4"x11") 11,15 L/dm³

36dB

4,80 kg / 10,58 lbs.


-

-

V-sync: 50-85 Hz

93 fL / max. 477 cm screen width

319 cd/m²

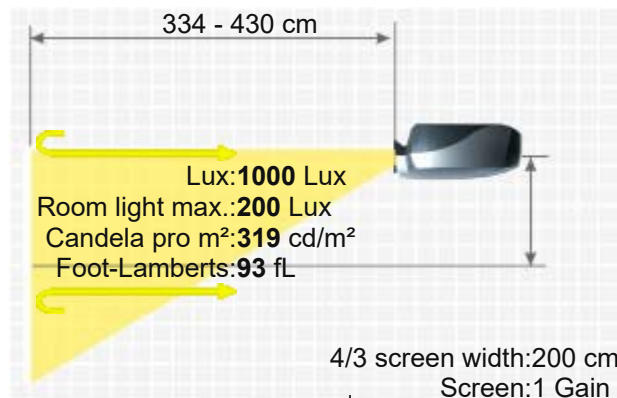

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/yokogawad3300X-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.